

Description


length: 7-5/32", grip: 6-3/4", thread: 10-32, cadmium plated steel, undrilled shank

* Manufacturer certifications are shipped with your order FREE of charge

Order this part online

Additional Information

SKU / Model:	AN371A
Minimum Qty (MOQ):	1
NSN:	5306-00-582-6690
ECCN:	EAR99
National Motor Freight:	093486, Bolts,nuts Or Screws, Noi (sub 3)

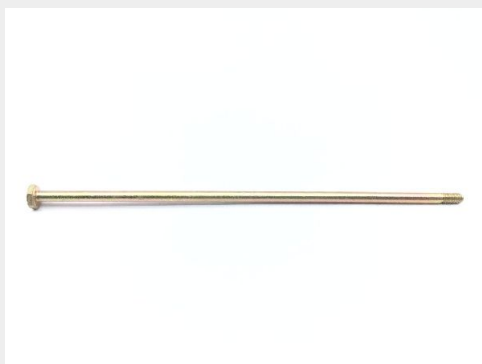

* See page 2 for technical characteristics

P/N AN3-71A Specifications

Thread Class:	3a
Thread Direction:	Right-hand
Thread Length:	0.406 Inches Minimum
Fastener Length:	7.140 Inches Minimum And 7.187 Inches Maximum
Head Style:	Hexagon
Head Height:	0.109 Inches Minimum And 0.141 Inches Maximum
Width Between Flats:	0.365 Inches Minimum And 0.377 Inches Maximum
Nominal Thread Diameter:	0.190 Inches
Grip Length:	6.734 Inches Minimum And 6.766 Inches Maximum
Features Provided:	Finished Head
Thread Quantity Per Inch:	32
Minimum Tensile Strength:	125000 Pounds Per Square Inch
Hardness Rating:	26.0 Rockwell C Minimum Overall And 32.0 Rockwell C Maximum Overall
Material:	Steel Overall
Surface Treatment:	Cadmium Overall
Thread Series Designator:	Unf

How to Order

Order this machine bolt from our inventory online by visiting <https://military-fasteners.com/bolts/machine+bolts/AN3-71A> and selecting the quantity you want then click "add to cart". Once items are in your cart you can check out [here](#) to complete your order.