

**Description**


length: 3/16", thread: 8-32, cup point

\* Manufacturer certifications are shipped with your order FREE of charge

Order this part online

**Additional Information**

|                    |                  |
|--------------------|------------------|
| SKU / Model:       | AN565D8H3        |
| Minimum Qty (MOQ): | 25               |
| NSN:               | 5305-00-282-3394 |
| ECCN:              | EAR99            |

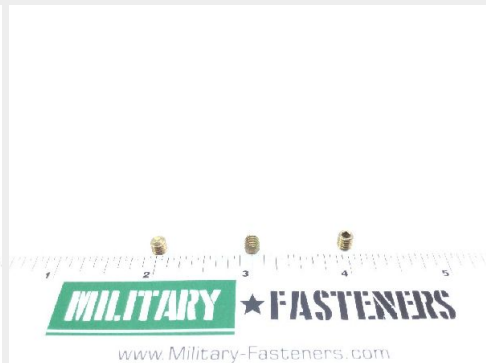

\* See page 2 for technical characteristics

## P/N AN565D8H3 Specifications

|                                     |   |
|-------------------------------------|---|
| <b>Thread Class:</b>                | 3a  |
| <b>Thread Direction:</b>            | Right-hand  |
| <b>Thread Length:</b>               | 0.188 Inches Minimum  |
| <b>Fastener Length:</b>             | 0.188 Inches Nominal  |
| <b>Head Style:</b>                  | Headless (setscrew)   |
| <b>Point Style:</b>                 | Cup   |
| <b>Internal Drive Style:</b>        | Hexagon   |
| <b>Nominal Thread Diameter:</b>     | 0.164 Inches  |
| <b>Width Across Flats:</b>          | 0.078 Inches Minimum And 0.079 Inches Maximum   |
| <b>Thread Quantity Per Inch:</b>    | 32  |
| <b>Hardness Rating:</b>             | 45.0 Rockwell C Minimum Overall And 53.0 Rockwell C Maximum Overall   |
| <b>Material:</b>                    | Steel Comp 4047h Overall Or Steel Comp 416se Overall Or Steel Comp 309s Overall Or Steel Comp 303ma Overall |
| <b>Surface Treatment:</b>           | Cadmium Overall And Chromate Overall  |
| <b>Thread Series Designator:</b>    | Unc   |
| <b>Nondefinitive Spec/std Data:</b> | 3 Type And 4 Style  |

## How to Order

Order this setscrew from our inventory online by visiting <https://military-fasteners.com/screws/setscrews/AN565D8H3> and selecting the quantity you want then click "add to cart". Once items are in your cart you can check out [here](#) to complete your order.