

**Description**


Fastener Length: 1/2, roughly 240 pieces per pound

\* Manufacturer certifications are shipped with your order FREE of charge

Order this part online

**Additional Information**

|                         |                     |
|-------------------------|---------------------|
| SKU / Model:            | MS20470E89          |
| Minimum Qty (MOQ):      | 1 Pound             |
| NSN:                    | 5320-01-223-1774    |
| ECCN:                   | EAR99               |
| National Motor Freight: | 013630, Alum Rivets |

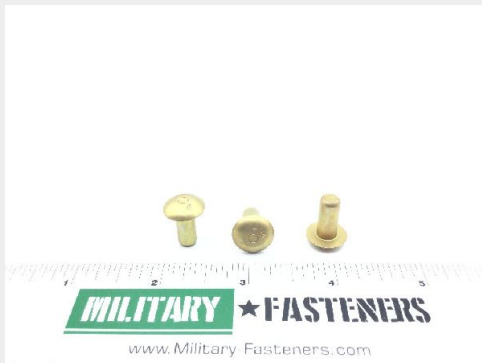

\* See page 2 for technical characteristics

## P/N MS20470E8-9 Specifications

|   |   |
|---|---|
| <b>Identification Code Color:</b>                     | Yellow  |
| <b>Fastener Length:</b>                               | 0.552 Inches Minimum And 0.572 Inches Maximum               |
| <b>Head Style:</b>                                    | Universal   |
| <b>Head Height:</b>                                   | 0.107 Inches Minimum And 0.117 Inches Maximum               |
| <b>Shank Diameter:</b>                                | 0.249 Inches Minimum And 0.254 Inches Maximum               |
| <b>Shank Style:</b>                                   | Straight W/radius Chamfered Tip                             |
| <b>Head Major Diameter:</b>                           | 0.475 Inches Minimum And 0.525 Inches Maximum               |
| <b>Shear Strength:</b>                                | 41000 Single Pounds Per Square Inch                         |
| <b>Special Features:</b>                              | Auminum Alloy 7050  |
| <b>Heat Treatment:</b>                                | T-73 Solution Heat Treated Overall                          |
| <b>Material:</b>                                      | Aluminum Alloy Overall                                      |
| <b>Material Document And Classification:</b>          | Qq-a-430 Fed Spec Single Material Response Overall          |
| <b>Surface Treatment:</b>                             | Chromate Overall  |
| <b>Surface Treatment Document And Classification:</b> | Mil-c-5541 Cl 1a Mil Spec Single Treatment Response Overall |

## How to Order

Order this solid rivet from our inventory online by visiting <https://military-fasteners.com/rivets/solid+rivets/MS20470E8-9> and selecting the quantity you want then click "add to cart". Once items are in your cart you can check out [here](#) to complete your order.