

**Description**

18 amps at 28VDC, 11 amps at 115VAC/60Hz, Momentary ON - OFF, lever with seal, screw terminal, heavy duty


\* Manufacturer certifications are shipped with your order FREE of charge

Order this part online

**Additional Information****Alternate Part Numbers**

[8834K5](#)

SKU / Model:	MS3505927
Minimum Qty (MOQ):	1
NSN:	5930-00-615-7882
ECCN:	EAR99
National Motor Freight:	061300, Circuit Breaker / Switch Noi

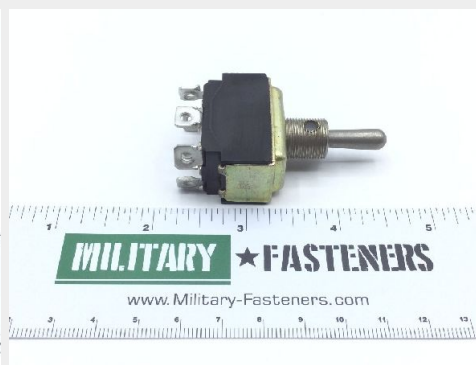

\* See page 2 for technical characteristics

P/N MS35059-27 Specifications

Unable To Decode:	Unable To Decode
Body Style:	Bushing Mount
Hazardous Locations/environmental Protection:	Submersible
Overall Length:	1.346 Inches Maximum
Overall Height:	2.410 Inches Nominal
Overall Width:	1.025 Inches Maximum
Bushing Length:	0.470 Inches Nominal
Body Length:	1.346 Inches Maximum
Body Width:	0.430 Inches Maximum
Actuator Style:	Round
Actuator Diameter:	0.240 Inches Nominal
Actuator Height:	0.690 Inches Nominal
Actuator Position-action Relationship:	Up Position Momentary And Down Position Momentary And Center Position Maintained
Maximum Voltage Rating In Volts:	115.0 Ac And 28.0 Dc
End Item Identification:	Missile Minuteman Lgm-30
Mounting Surface To Terminal End Distance:	1.250 Inches Maximum
Inclosure Type:	Fully Inclosed
Mounting Method:	Threaded Bushing
Features Provided:	Actuator Seal
Thread Quantity Per Inch:	32
Nominal Thread Size:	0.469 Inches
Nonpile-up Contact Arrangement:	2 Pole, Double Throw, Two Positions Momentary Single Switch Unit
Contact Load Current Rating At Maximum Rated Voltage:	18.000 Amperes Resistive Dc And 10.000 Amperes Inductive Dc And 5.000 Amperes Lamp Dc And 11.000 Amperes Resistive Ac And 8.000 Amperes Inductive Ac And 2.000 Amperes Lamp Ac
Test Data Document:	81349-mil-dtl-83731 Specification (includes Engineering Type Bulletins, Brochures,etc., That Reflect Specification Type Data In Specification Format; Excludes Commercial Catalogs, Industry Directories, And Similar Trade Publications, Reflecting General Type Data On Certain Environmental And Performance Requirements And Test Conditions That Are Shown As "typical", "average", "nominal", Etc.).
Thread Series Designator:	Uns

<b>Terminal Type And Quantity:</b>	6 Tab W/screw
<b>Specification/standard Data:</b>	96906-ms35059 Government Standard

## How to Order

Order this toggle switch from our inventory online by visiting <https://military-fasteners.com/switches/toggle+switches/MS35059-27> and selecting the quantity you want then click "add to cart". Once items are in your cart you can check out [here](#) to complete your order.