

Description


thread: 10-32, drilled, jam nut, thin, NAS1423 series nut

* Manufacturer certifications are shipped with your order FREE of charge

Order this part online

Additional Information

| | |
|-------------------------|---|
| SKU / Model: | NAS14233 |
| Minimum Qty (MOQ): | 10 |
| NSN: | 5310-01-077-3123 |
| Schedule B: | 7318.16.0085 |
| ECCN: | EAR99 |
| National Motor Freight: | 093486, Bolts,nuts Or Screws, Noi (sub 3) |

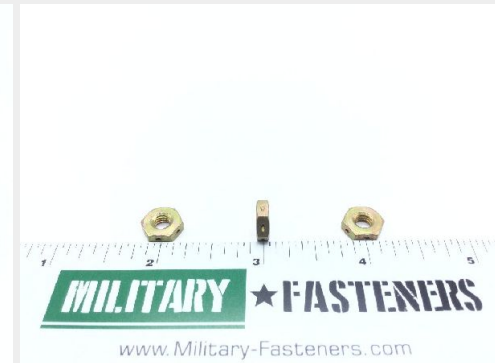

P/N NAS1423-3 Specifications

| | |
|---|--|
| Thread Class: | 3b |
| Thread Direction: | Right-hand |
| Nut Style: | Hexagon |
| Nut Height: | 0.115 Inches Minimum And 0.135 Inches Maximum |
| Drilled Hole Diameter: | 0.034 Inches Minimum And 0.039 Inches Maximum |
| Hole Type And Quantity: | 3 Drilled |
| Width Across Flats: | 0.365 Inches Minimum And 0.377 Inches Maximum |
| Thread Series: | Unjf |
| Thread Quantity Per Inch: | 32 |
| Hardness Rating: | 34.0 Rockwell C Minimum And 38.0 Rockwell C Maximum |
| Nominal Thread Size: | 0.190 Inches |
| Hole Configuration Style: | Configuration B |
| Bearing Surface Type: | Chamfered |
| Bearing Surface Finish: | 125.0 Microinches |
| Material: | Steel Comp 4130 Overall Or Steel Comp 4340 Overall |
| Material Document And Classification: | Mil-s-6758,cond D1 Or D4 Or F4 Mil Spec 1st Material Response Overall Or Mil-s-5000,cond C1 Or C4 Mil Spec 2nd Material Response Overall |
| Surface Treatment: | Cadmium Overall And Chromate Overall |
| Surface Treatment Document And Classification: | Qq-p-416,type 2,class 2 Fed Spec Single Treatment Response Overall |
| Specification/standard Data: | 80205-nas1423 Professional/industrial Association Standard |

How to Order

Order this plain hexagon nut from our inventory online by visiting <https://military-fasteners.com/nuts/plain+hexagon+nuts/NAS1423-3> and selecting the quantity you want then click "add to cart". Once items are in your cart you can check out [here](#) to complete your order.