

**Description**


length: 0.698", grip: 0.375", thread: 10-32, pan head close tolerance bolt, cadmium plated alloy steel, philips recess

\* Manufacturer certifications are shipped with your order FREE of charge

Order this part online

**Additional Information**

|                         |   |
|-------------------------|---|
| SKU / Model:            | NAS77036                                  |
| Minimum Qty (MOQ):      | 100                                       |
| NSN:                    | 5305-01-276-8235                          |
| ECCN:                   | EAR99                                     |
| National Motor Freight: | 093486, Bolts,nuts Or Screws, Noi (sub 3) |

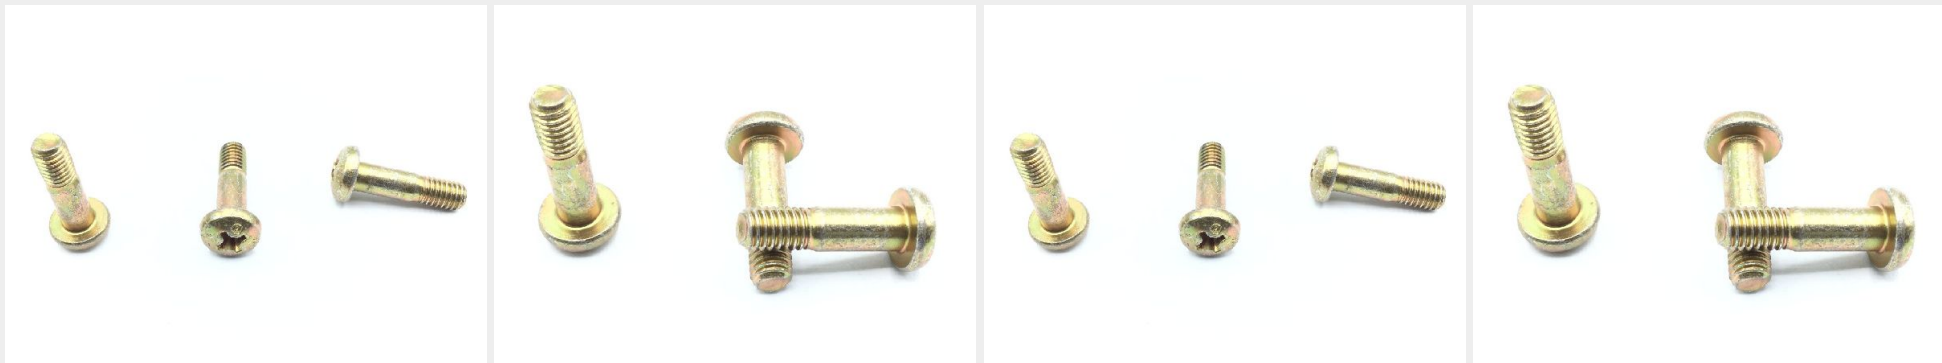

\* See page 2 for technical characteristics

## P/N NAS7703-6 Specifications

|                                  |  |
|----------------------------------|--|
| <b>Thread Class:</b>             | 3a   |
| <b>Thread Direction:</b>         | Right-hand   |
| <b>Thread Length:</b>            | 0.298 Inches Minimum And 0.348 Inches Maximum      |
| <b>Fastener Length:</b>          | 0.683 Inches Minimum And 0.713 Inches Maximum      |
| <b>Head Style:</b>               | Pan  |
| <b>Head Diameter:</b>            | 0.357 Inches Minimum And 0.373 Inches Maximum      |
| <b>Head Height:</b>              | 0.122 Inches Minimum And 0.133 Inches Maximum      |
| <b>Grip Diameter:</b>            | 0.188 Inches Minimum And 0.190 Inches Maximum      |
| <b>Internal Drive Style:</b>     | Cross Recess Type 1                                |
| <b>Nominal Thread Diameter:</b>  | 0.190 Inches                                       |
| <b>Grip Length:</b>              | 0.365 Inches Minimum And 0.385 Inches Maximum      |
| <b>Thread Quantity Per Inch:</b> | 32   |
| <b>Minimum Tensile Strength:</b> | 160000 Pounds Per Square Inch                      |
| <b>Material:</b>                 | Steel Comp 4340 Overall Or Steel Comp 8740 Overall |
| <b>Surface Treatment:</b>        | Cadmium Overall And Chromate Overall               |
| <b>Thread Series Designator:</b> | Unjf   |

## How to Order

Order this close tolerance screw from our inventory online by visiting <https://military-fasteners.com/screws/close+tolerance+screws/NAS7703-6> and selecting the quantity you want then click "add to cart". Once items are in your cart you can check out [here](#) to complete your order.