

Description

total panel thickness 0.09" - 0.119", corrosion resistant steel, philips recess


* Manufacturer certifications are shipped with your order FREE of charge

Order this part online

Additional Information**Alternate Part Numbers**

[1126008-3](#)

SKU / Model:	26S513
Minimum Qty (MOQ):	5
NSN:	5325-01-270-4289
ECCN:	EAR99
National Motor Freight:	066440, Fasteners Curtain / Snap Metal

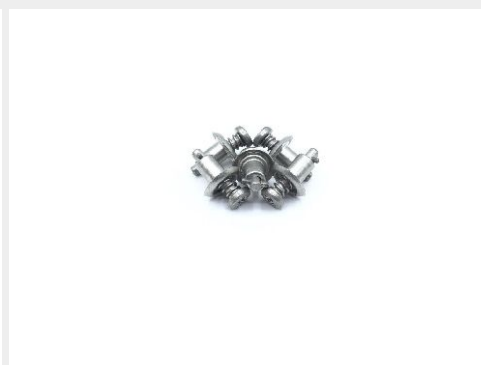

* See page 2 for technical characteristics

P/N 26S51-3 Specifications

Diameter:	0.298 Inches Minimum And 0.308 Inches Maximum
Securing Device Type:	Spring
Turnlock Stud Head Style:	Fillister
Stud Assembly Style:	Stud Assembly
Distance From Engaging Member To Largest Bearing Surface Of Head:	0.611 Inches Nominal
Eyelet Outside Diameter:	0.244 Inches Minimum And 0.250 Inches Maximum
Eyelet Length:	0.332 Inches Nominal
Material Accommodated Thickness:	0.090 Inches Minimum And 0.119 Inches Maximum
Drive Type:	Cross Recess
Material:	Steel Comp 302 Ejector Spring
Material:	Steel Comp 302 Stud Or Steel Corrosion Resisting Stud
Material:	Steel Comp 302 Pin
Material:	Steel Comp 305 Eyelet
Material Document And Classification:	Astm A580 Assn Std Single Material Response Ejector Spring
Material Document And Classification:	Astm A580 Assn Std Single Material Response Pin
Material Document And Classification:	Qq-s-766 Fed Spec Single Material Response Eyelet
Material Document And Classification:	Stm A580 Fed Spec Single Material Response Stud Or Comp 384,cagec 71321 Mfr Ref 2nd Material Response Stud
Surface Treatment:	Passivate Overall
Surface Treatment Document And Classification:	Qq-p-35 Fed Spec Single Treatment Response Overall

How to Order

Order this turnlock fastener stud assembly from our inventory online by visiting <https://military-fasteners.com/studs/turnlock+fastener+stud+assemblies/26S51-3> and selecting the quantity you want then click "add to cart". Once items are in your cart you can check out [here](#) to complete your order.