

Description


Length: 2-31/32", grip: 2-5/16", thread: 7/16-20, cadmium plated steel, drilled shank, AN177 series bolt

* Manufacturer certifications are shipped with your order FREE of charge

Order this part online

Additional Information

SKU / Model:	AN17727
Minimum Qty (MOQ):	2
NSN:	5306-00-180-0364
Schedule B:	7318.15.8085
ECCN:	EAR99
National Motor Freight:	093486, Bolts,nuts Or Screws, Noi (sub 3)

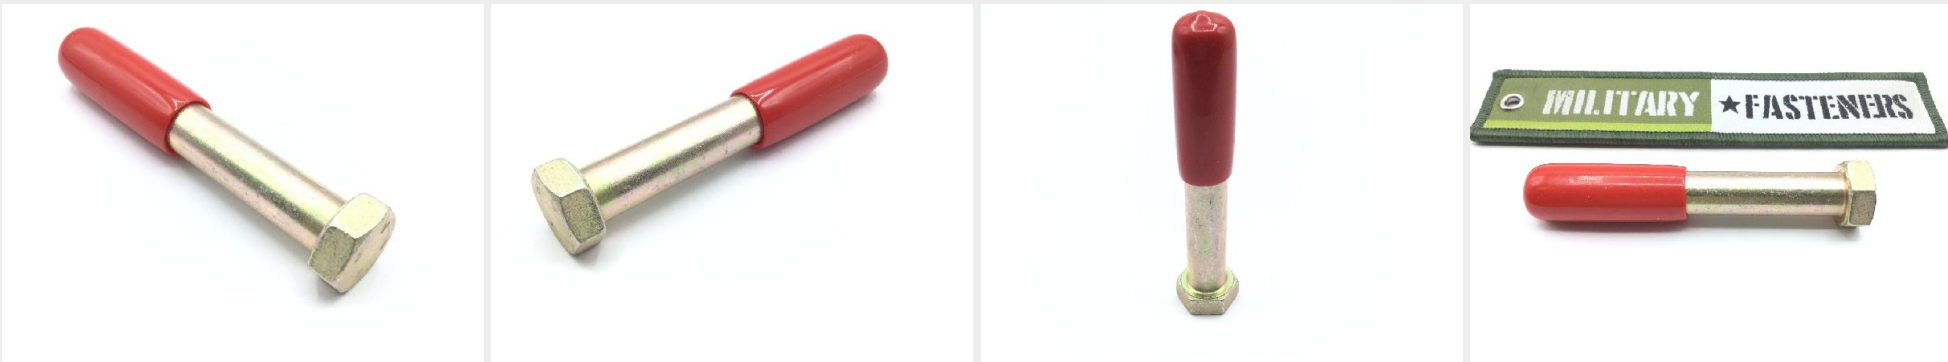

P/N AN177-27 Specifications

Thread Class:	3a
Thread Length:	0.657 Inches Minimum
Fastener Length:	2.969 Inches Nominal
Head Height:	0.234 Inches Minimum And 0.266 Inches Maximum
Shank Unthreaded Hole Diameter:	0.106 Inches Nominal First Hole
iii End Item Identification:	Spec Item
Minimum Tensile Strength:	125000 Pounds Per Square Inch
Material:	Steel Comp 8740 Overall Or Steel Comp 8630 Overall Or Steel Comp 8735 Overall Or Steel Comp 4037 Overall Or Steel Comp 4140 Overall Or Steel Comp 4130 Overall
Material:	Steel Comp 8740 Or Steel Comp 8630 Or Steel Comp 8735 Or Steel Comp 4037 Or Steel Comp 4140 Or Steel Comp 4130 Overall
Material Document And Classification:	Mil-s-6049 Mil Spec 1st Material Response Overall Or Mil-s-6050 Mil Spec 2nd Material Response Overall Or Mil-s-6098 Mil Spec 3rd Material Response Overall Or Ams 6300 Assn Std 4th Material Response Overall Or Mil-s-5626 Mil Spec 5th Material Response Overall Or Mil-s-6758 Mil Spec 6th Material Response Overall
Material Document And Classification:	Mil-s-6049 Mil Spec 1st Material Response Or Mil-s-6050 Mil Spec 2nd Material Response Or Mil-s-6098 Mil Spec 3rd Material Response Or Ams 6300 Assn Std 4th Material Response Or Mil-s-5626 Mil Spec 5th Material Response Or Mil-s-6758 Mil Spec 6th Material Response Overall

How to Order

Order this close tolerance bolt from our inventory online by visiting <https://military-fasteners.com/bolts/close+tolerance+bolts/AN177-27> and selecting the quantity you want then click "add to cart". Once items are in your cart you can check out [here](#) to complete your order.