

Description



Fastener Length: 9/64", Thread: 6-32, Head Width: 1/16", Thread Length: 9/64

* Manufacturer certifications are shipped with your order FREE of charge

Order this part online

Additional Information

SKU / Model:	AN565D6H3
Minimum Qty (MOQ):	20
NSN:	5305-00-141-4394
ECCN:	EAR99
National Motor Freight:	093486, Bolts,nuts Or Screws, Noi (sub 3)

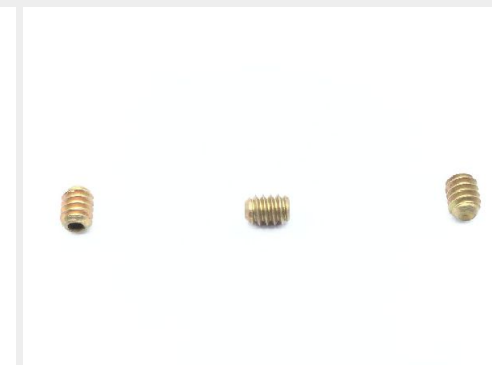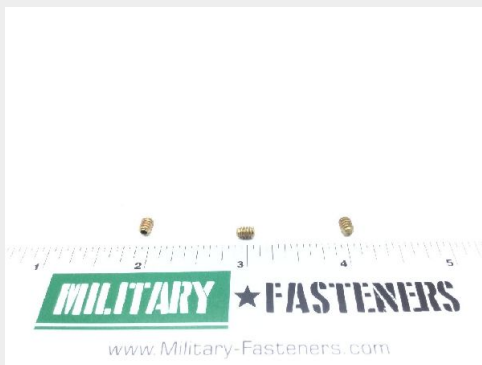

* See page 2 for technical characteristics

P/N AN565D6H3 Specifications

Thread Class:	3a
Thread Direction:	Right-hand
Thread Length:	0.138 Inches Nominal
Fastener Length:	0.138 Inches Nominal
Head Style:	Headless (setscrew)
Point Style:	Cup
Internal Drive Style:	Hexagon
Nominal Thread Diameter:	0.138 Inches
Width Across Flats:	0.062 Inches Nominal
Features Provided:	Casehardened
Thread Quantity Per Inch:	32
Hardness Rating:	45.0 Rockwell C Minimum Overall And 53.0 Rockwell C Maximum Overall
Material:	Steel Comp 4037 Overall Or Steel Comp 4137 Overall Or Steel Comp 8740 Overall Or Steel Comp 8630 Overall
Material Document And Classification:	Qq-s-624 Fed Spec 1st Material Response Overall Or Qq-s-624 Fed Spec 2nd Material Response Overall Or Mil-s-6049 Mil Spec 3rd Material Response Overall Or Mil-s-6050 Mil Spec 4th Material Response Overall
Surface Treatment:	Cadmium Overall
Thread Series Designator:	Unc

How to Order

Order this setscrew from our inventory online by visiting <https://military-fasteners.com/screws/setscrews/AN565D6H3> and selecting the quantity you want then click "add to cart". Once items are in your cart you can check out [here](#) to complete your order.