

**Description**


tube outer diameter: 5/16", thread: 1/2-20, male to male external thread, flared tube, aluminum,

\* Manufacturer certifications are shipped with your order FREE of charge

Order this part online

**Additional Information**

SKU / Model:	AN9193D
Minimum Qty (MOQ):	2
NSN:	4730-00-684-7451
ECCN:	EAR99
National Motor Freight:	051400, Pipe Fittings Aluminum

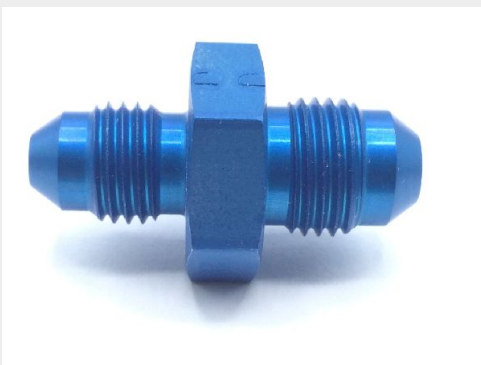

## P/N AN919-3D Specifications

<b>Thread Class:</b>	3a 2nd End
<b>Thread Class:</b>	3a 1st End
<b>Reducer Type:</b>	Concentric
<b>Connection Style:</b>	Flared (tube) 1st End
<b>Connection Style:</b>	Flared (tube) 2nd End
<b>Connection Type:</b>	Threaded External Tube 1st End
<b>Connection Type:</b>	Threaded External Tube 2nd End
<b>Nominal Thread Size:</b>	0.438 Inches 2nd End
<b>Nominal Thread Size:</b>	0.500 Inches 1st End
<b>Seat Angle:</b>	37.0 Degrees 1st End
<b>Seat Angle:</b>	37.0 Degrees 2nd End
<b>Nominal Outside Diameter Tube Accommodated:</b>	0.250 Inches 2nd End
<b>Nominal Outside Diameter Tube Accommodated:</b>	0.312 Inches 1st End
<b>Nominal Overall Length:</b>	1.359 Inches
<b>Material:</b>	Aluminum Alloy Overall
<b>Surface Treatment:</b>	Anodize Inside
<b>Surface Treatment:</b>	Anodize Outside
<b>Thread Series Designator:</b>	Unjf All Ends

## How to Order

Order this tube reducer from our inventory online by visiting <https://military-fasteners.com/fittings/tube+reducers/AN919-3D> and selecting the quantity you want then click "add to cart". Once items are in your cart you can check out [here](#) to complete your order.