

Description

tube outer diameter: 3/4", thread: 1-1/16-12, flared tube plug aluminum


* Manufacturer certifications are shipped with your order FREE of charge

Order this part online

Additional Information**Alternate Part Numbers**

[AN806D12](#)

SKU / Model:	AS5168D12
Minimum Qty (MOQ):	5
NSN:	4730-00-080-3091
ECCN:	EAR99
National Motor Freight:	051400, Pipe Fittings Aluminum

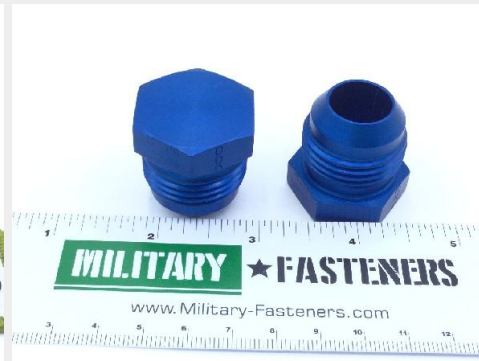

* See page 2 for technical characteristics

P/N AS5168D12 Specifications

Thread Class:	3a External
Thread Direction:	Right-hand External
Head Height:	0.341 Inches Nominal
Overall Length:	1.203 Inches Minimum And 1.234 Inches Maximum
End Item Identification:	Mrap Buffalo Mk2a2
Connection Style:	Flared
Thread Quantity Per Inch:	12 External
Nominal Thread Size:	1.062 Inches External
Seat Angle:	37.0 Degrees
Special Features:	Grumman Aerospace Corp Supports A10 Aircraft
Material:	Aluminum Alloy 2014 Or Aluminum Alloy 7075 Overall
Material Document And Classification:	Qq-a-367,t6 Fed Spec 1st Material Response Or Qq-a-367,t73 Fed Spec 2nd Material Response Overall
Surface Treatment:	Anodize Overall
Surface Treatment Document And Classification:	Mil-a-8625,ty 2,cl 2,blue Mil Spec Single Treatment Response Overall
Style Designator:	C42 Plug, Tube Fitting Flared (note: Drilled Hole Is Optional, Should Not Be Considered As A Separating Characteristic)
Style Designator:	Plug, Tube Fitting Flared (note: Drilled Hole Is Optional, Should Not Be Considered As A Separating Characteristic)
Thread Series Designator:	Un External

How to Order

Order this threaded tube fitting plug from our inventory online by visiting <https://military-fasteners.com/fittings/threaded+tube+fitting+plugs/AS5168D12> and selecting the quantity you want then click "add to cart". Once items are in your cart you can check out [here](#) to complete your order.