

Description


BACB30LH3-10 Close Tolerance Screw

\* Manufacturer certifications are shipped with your order FREE of charge

Order this part online

Additional Information

SKU / Model:	BACB30LH310
Minimum Qty (MOQ):	10
NSN:	5305-01-271-3279
ECCN:	EAR99
National Motor Freight:	093486, Bolts,nuts Or Screws, Noi (sub 3)

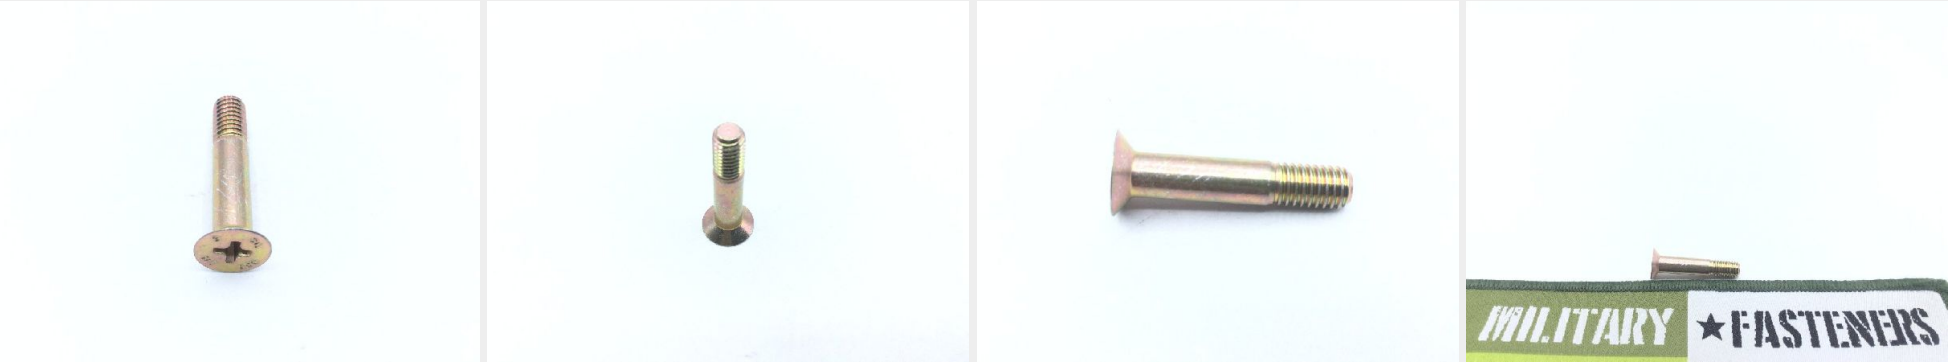

\* See page 2 for technical characteristics

## P/N BACB30LH3-10 Specifications

<b>Thread Class:</b>	3a
<b>Thread Direction:</b>	Right-hand
<b>Thread Length:</b>	0.320 Inches Minimum And 0.370 Inches Maximum
<b>Fastener Length:</b>	0.955 Inches Minimum And 0.985 Inches Maximum
<b>Head Style:</b>	Flat Countersunk
<b>Head Diameter:</b>	0.337 Inches Minimum And 0.383 Inches Maximum
<b>Grip Diameter:</b>	0.1885 Inches Minimum And 0.1895 Inches Maximum
<b>Internal Drive Style:</b>	Cross Recess Type 1
<b>Nominal Thread Diameter:</b>	0.190 Inches
<b>Grip Length:</b>	0.615 Inches Minimum And 0.635 Inches Maximum
<b>Thread Quantity Per Inch:</b>	32
<b>Countersink Angle:</b>	99.0 Degrees Minimum And 101.0 Degrees Maximum
<b>Surface Finish:</b>	32.0 Microinches Bearing Surface Of Head
<b>Surface Finish:</b>	32.0 Microinches Grip
<b>Surface Finish:</b>	32.0 Microinches Threads
<b>Material:</b>	Iron Alloy 660 Overall
<b>Material Document And Classification:</b>	Ams5737 Assn Std Single Material Response Overall
<b>Surface Treatment:</b>	Cadmium Overall And Chromate Overall
<b>Surface Treatment Document And Classification:</b>	Qq-p-416,type 2,class 2 Fed Spec Single Treatment Response Overall
<b>Thread Series Designator:</b>	Unf

## How to Order

Order this close tolerance screw from our inventory online by visiting <https://military-fasteners.com/screws/close+tolerance+screws/BACB30LH3-10> and selecting the quantity you want then click "add to cart". Once items are in your cart you can check out [here](#) to complete your order.