
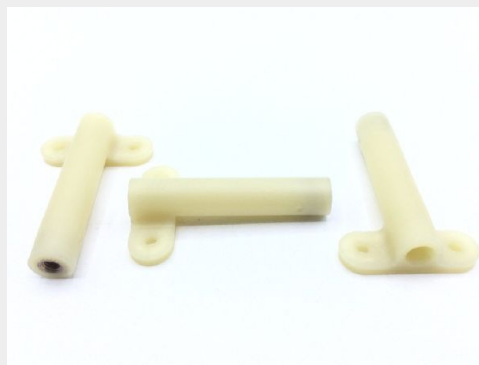


**Description**

BACN10TS3-18 Self-Locking Nutplate

\* Manufacturer certifications are shipped with your order FREE of charge[Order this part online](#)**Additional Information**

SKU / Model:	BACN10TS318
Minimum Qty (MOQ):	10
NSN:	5310-01-049-6259
ECCN:	EAR99
National Motor Freight:	093486, Bolts,nuts Or Screws, Noi (sub 3)

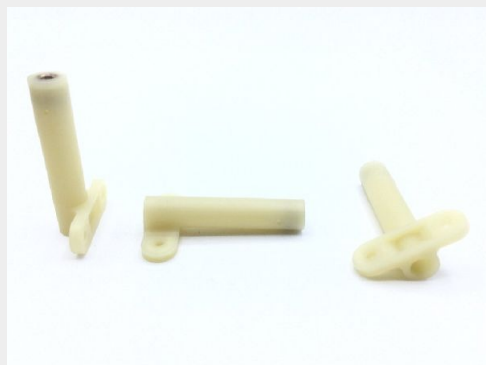

## P/N BACN10TS3-18 Specifications

<b>Thread Class:</b>	2b
<b>Thread Direction:</b>	Right-hand
<b>Locking Feature:</b>	Prevailing Torque With Metallic Insert
<b>Mounting Hole Diameter:</b>	0.133 Inches Minimum And 0.143 Inches Maximum
<b>Nut Style:</b>	Plate
<b>Nut Length:</b>	2.210 Inches Minimum And 2.390 Inches Maximum
<b>Distance From Base To Center Of Aperture:</b>	0.280 Inches Minimum And 0.340 Inches Maximum
<b>Nut Height:</b>	2.170 Inches Minimum And 2.270 Inches Maximum
<b>Plate Thickness:</b>	0.110 Inches Minimum And 0.150 Inches Maximum
<b>Plate Width:</b>	1.440 Inches Minimum And 1.590 Inches Maximum
<b>Nut Mounting Provision:</b>	Straight Holes
<b>Mounting Hole Arrangement Style:</b>	2 Holes
<b>Distance From Mounting Hole Center To Base:</b>	1.990 Inches Minimum And 2.110 Inches Maximum
<b>Center To Center Distance Between Mounting Holes Along Width:</b>	1.000 Inches Minimum And 1.030 Inches Maximum
<b>Thread Series:</b>	Unf
<b>Thread Quantity Per Inch:</b>	32
<b>Nominal Thread Size:</b>	0.190 Inches
<b>Special Features:</b>	0.063 In. Min,0.070 In. Max Inspection Hole Through Nut
<b>Material:</b>	Plastic Polyamide Overall
<b>Material Document And Classification:</b>	L-p-395,ty1,class 1 Fed Std Single Material Response Overall Or L-p-395,ty1,class 2 Fed Std Single Material Response Overall

## How to Order

Order this self-locking nutplate from our inventory online by visiting [https://military-fasteners.com/nuts/self\\_locking+nutplates/BACN10TS3-18](https://military-fasteners.com/nuts/self_locking+nutplates/BACN10TS3-18) and selecting the quantity you want then click "add to cart". Once items are in your cart you can check out [here](#) to complete your order.