

Description

steel cadmium

* Manufacturer certifications are shipped with your order FREE of charge

Order this part online

Additional Information

Alternate Part Numbers

[HL86KP-6](#)

SKU / Model:

HL86KP6

Minimum Qty (MOQ):


10

NSN:

5320-01-500-5711

ECCN:

EAR99

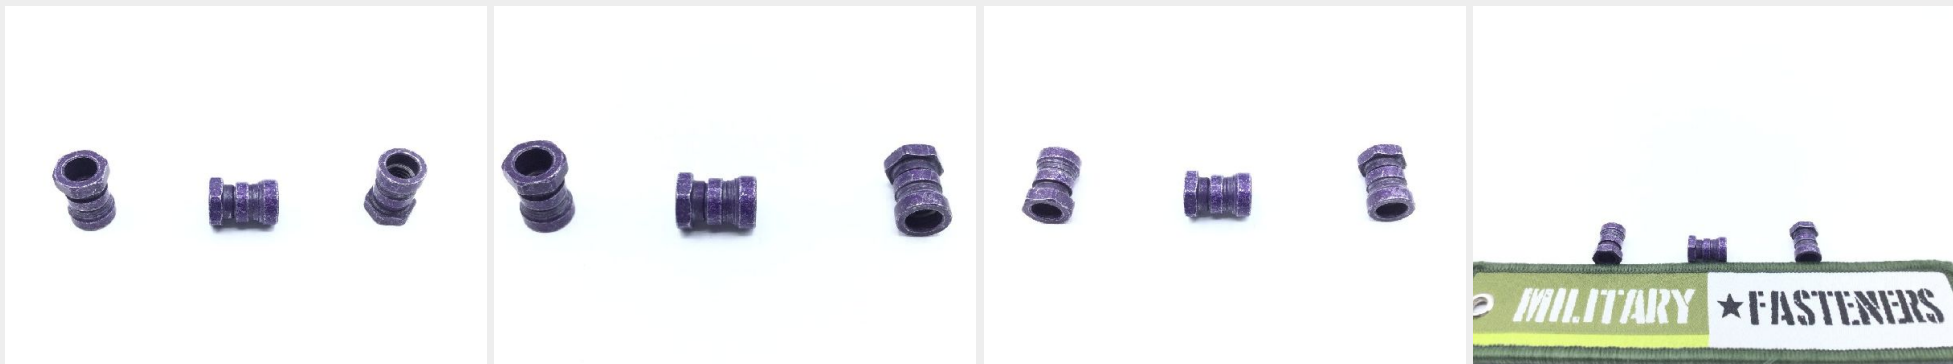

* See page 2 for technical characteristics

P/N HL86KP6 Specifications

Thread Class:	3b
Thread Direction:	Right-hand
Identification Code Color:	Violet, Purple
Collar Outside Diameter:	0.303 Inches Minimum And 0.307 Inches Maximum
Collar Overall Height:	0.436 Inches Minimum And 0.457 Inches Maximum
Lubrication:	Cetyl Alcohol, Spec 305, Hi-shear Corp
Collar Inside Diameter:	0.192 Inches Minimum And 0.200 Inches Maximum
Thread Quantity Per Inch:	32
Nominal Thread Size:	0.190 Inches
Collar Style:	Threaded (break Off) Type
Material:	Steel Comp 303se Overall
Material Document And Classification:	Astma-582 Assn Std Single Material Response Overall
Surface Treatment:	Cadmium Overall
Surface Treatment Document And Classification:	Ams-qq-p-416,typeii,class2 Fed Spec Single Treatment Response Overall
Thread Series Designator:	Unjf

How to Order

Order this pin-rievet collar from our inventory online by visiting https://military-fasteners.com/collars/pin_rievet+collars/HL86KP6 and selecting the quantity you want then click "add to cart". Once items are in your cart you can check out [here](#) to complete your order.