

**Description**


shear application, high temperature alloy, silver plated

\* Manufacturer certifications are shipped with your order FREE of charge

Order this part online

**Additional Information**

SKU / Model:	HL974
Minimum Qty (MOQ):	5
NSN:	5320-01-482-9761
ECCN:	EAR99
National Motor Freight:	096320, Rivets I / S Nickel Plated Buffed

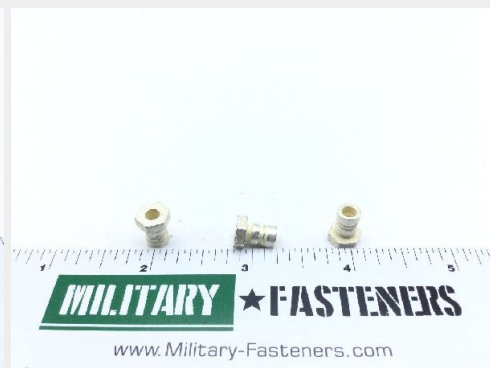

\* See page 2 for technical characteristics

## P/N HL97-4 Specifications

<b>Thread Class:</b>	3b
<b>Thread Direction:</b>	Right-hand
<b>Collar Outside Diameter:</b>	0.235 Inches Minimum And 0.245 Inches Maximum
<b>Collar Overall Height:</b>	0.435 Inches Nominal
<b>Lubrication:</b>	Cetyl Alcohol
<b>Collar Inside Diameter:</b>	0.143 Inches Minimum And 0.147 Inches Maximum
<b>Thread Quantity Per Inch:</b>	32
<b>Nominal Thread Size:</b>	0.138 Inches
<b>Collar Style:</b>	Threaded (break Off) Type
<b>Material:</b>	Steel Corrosion Resisting Washer
<b>Material Document And Classification:</b>	Ams5731 Assn Std 1st Material Response Washer Or Ams5734 Fed Spec 2nd Material Response Washer Or Ms5736 Assn Std Single Material Response Washer
<b>Precious Material:</b>	Silver
<b>Surface Treatment:</b>	Silver Collar
<b>Surface Treatment Document And Classification:</b>	Ams 2410 Assn Std Single Treatment Response Body
<b>Thread Series Designator:</b>	Unjc

## How to Order

Order this pin-rivet collar from our inventory online by visiting [https://military-fasteners.com/collars/pin\\_rivet+collars/HL97-4](https://military-fasteners.com/collars/pin_rivet+collars/HL97-4) and selecting the quantity you want then click "add to cart". Once items are in your cart you can check out [here](#) to complete your order.