

## Description


Fastener Length: 5/16", Thread: 8-32, Head Width: 5/64", MS18065 series screw

\* Manufacturer certifications are shipped with your order FREE of charge

Order this part online

## Additional Information

SKU / Model:	MS1806518
Minimum Qty (MOQ):	10
NSN:	5305-01-199-3770
Schedule B:	7318.15.6080
ECCN:	EAR99
National Motor Freight:	096630, Screws Noi Brass / Bronze / Copper

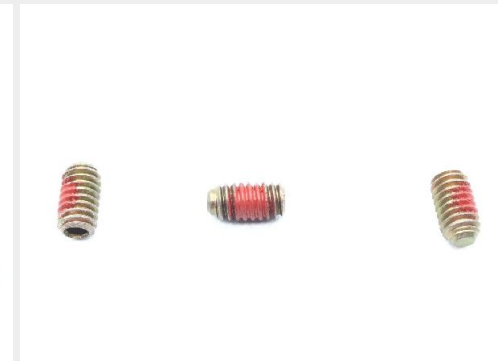

\* See page 2 for technical characteristics

## P/N MS18065-18 Specifications

<b>Thread Class:</b>	3a
<b>Thread Direction:</b>	Right-hand
<b>Fastener Length:</b>	0.302 Inches Minimum And 0.322 Inches Maximum
<b>Head Style:</b>	Headless (setscrew)
<b>Locking Feature:</b>	Pellet Threads Or Strip Threads
<b>Point Style:</b>	Flat
<b>Internal Drive Style:</b>	Hexagon
<b>Nominal Thread Diameter:</b>	0.164 Inches
<b>Width Across Flats:</b>	0.078 Inches Minimum And 0.079 Inches Maximum
<b>Thread Quantity Per Inch:</b>	32
<b>Hardness Rating:</b>	45.0 Rockwell C Minimum Overall And 53.0 Rockwell C Maximum Overall
<b>Material:</b>	Steel Comp 4032 Overall Or Steel Comp 4037 Overall Or Steel Comp 4137 Overall Or Steel Comp 4140 Overall Or Steel Comp 8630 Overall Or Steel Comp 8740 Overall
<b>Material Document And Classification:</b>	N0.66 Fed Std All Material Responses Overall
<b>Surface Treatment:</b>	Cadmium Overall
<b>Surface Treatment Document And Classification:</b>	Qq-p-416,type 2,class 3 Fed Spec Single Treatment Response Overall
<b>Thread Series Designator:</b>	Unc

## How to Order

Order this machine screw from our inventory online by visiting <https://military-fasteners.com/screws/machine+screws/MS18065-18> and selecting the quantity you want then click "add to cart". Once items are in your cart you can check out [here](#) to complete your order.