

Description


tube outer dia: 1/2", tube thread: 3/4-16 pipe thread: 3/8", flared pipe to tube, aluminum alloy

* Manufacturer certifications are shipped with your order FREE of charge

Order this part online

Additional Information

SKU / Model:	MS208238D
Minimum Qty (MOQ):	1
NSN:	4730-00-990-1759
ECCN:	EAR99
National Motor Freight:	051400, Pipe Fittings Aluminum

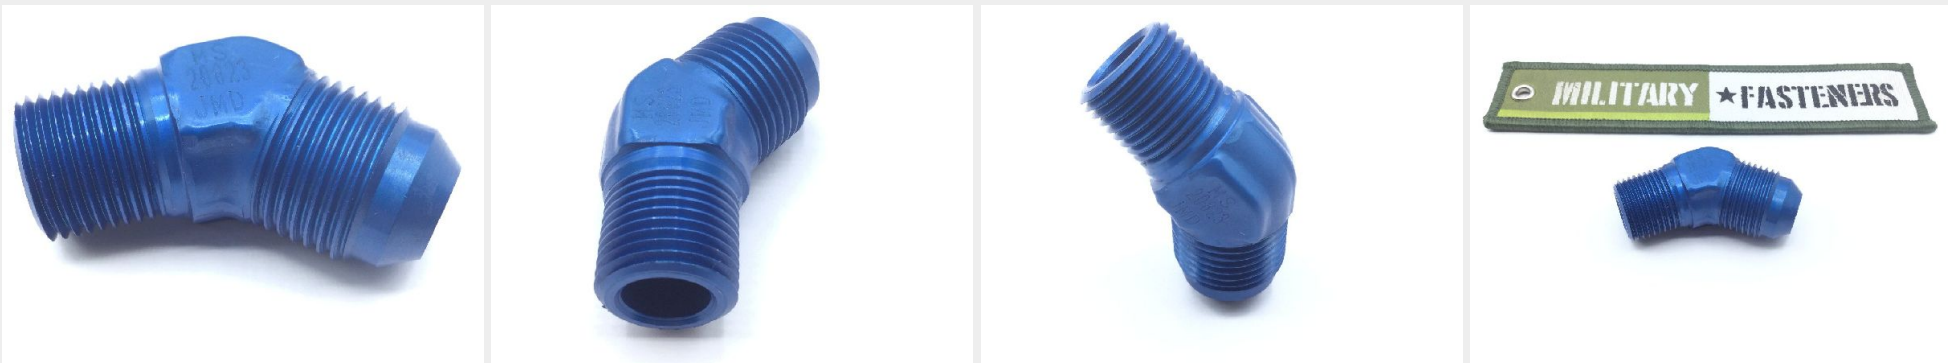

P/N MS20823-8D Specifications

Thread Class:	3a 1st End
Connection Style:	Flared (tube) 1st End
Connection Style:	Plain (pipe) 2nd End
Leg Length:	0.938 Inches Nominal 2nd End
Leg Length:	0.969 Inches Nominal 1st End
Connection Type:	Threaded External Pipe 2nd End
Connection Type:	Threaded External Tube 1st End
Nominal Thread Size:	0.375 Inches 2nd End
Nominal Thread Size:	0.750 Inches 1st End
Seat Angle:	37.0 Degrees 1st End
Flow Angle:	45.0 Degrees
Nominal Outside Diameter Tube Accommodated:	0.500 Inches 1st End
Special Features:	Grumman Aerospace A-10 Aircraft
Material:	Aluminum Alloy Overall
Surface Treatment:	Anodize Overall
Surface Treatment Document And Classification:	Mil-a-8625 Mil Spec Single Treatment Response Overall
Thread Series Designator:	Npt 2nd End
Thread Series Designator:	Unjf 1st End
Specification/standard Data:	96906-ms20823 Government Standard

How to Order

Order this pipe to tube elbow from our inventory online by visiting <https://military-fasteners.com/fittings/pipe+to+tube+elbows/MS20823-8D> and selecting the quantity you want then click "add to cart". Once items are in your cart you can check out [here](#) to complete your order.