

Description


length: 0.50", round head, MS21318 series screw

* Manufacturer certifications are shipped with your order FREE of charge

Order this part online

Additional Information

SKU / Model:	MS2131837
Minimum Qty (MOQ):	100
NSN:	5305-00-850-5841
ECCN:	EAR99
National Motor Freight:	093486, Bolts,nuts Or Screws, Noi (sub 3)

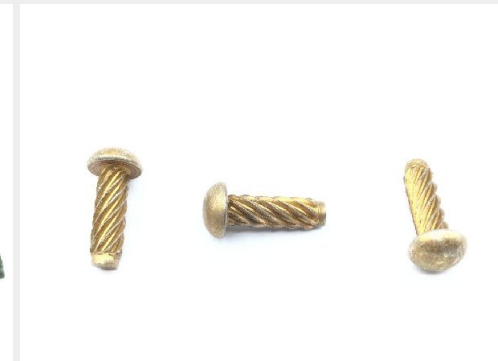

* See page 2 for technical characteristics

P/N MS21318-37 Specifications

Fastener Length:	0.500 Inches Nominal
Head Style:	Round
Head Diameter:	0.264 Inches Minimum And 0.285 Inches Maximum
Head Height:	0.099 Inches Minimum And 0.111 Inches Maximum
Pilot Diameter:	0.122 Inches Minimum And 0.126 Inches Maximum
Pilot Length:	0.062 Inches Nominal
End Item Identification:	5895-01-514-7015, Communications Interface System (cis) (v) 2
Features Provided:	Casehardened
Nonmachine Thread Style:	Drive Screw (type U)
Nonmachine Nominal Thread Diameter:	0.152 Inches
Part Name Assigned By Controlling Agency:	Screw, Drive, Round Head, Type U, Steel, Carbon, Cadmium Plated
Special Features:	Screw Is Not Recommended For Use In Material The Thickness Of Which Is Less Than One Diameter Of The Screw
Material:	Steel Overall
Surface Treatment:	Cadmium Overall And Chromate Overall
Surface Treatment Document And Classification:	Qq-p-416 Ty 2 Cl 3 Fed Spec All Treatment Responses Overall
Specification/standard Data:	80205 - Nas-21318, 25 Nov 1998 Which Replaced Ms21318, Rev A0./13/65 Professional/Industrial Association Specification

How to Order

Order this drive screw from our inventory online by visiting <https://military-fasteners.com/screws/drive+screws/MS21318-37> and selecting the quantity you want then click "add to cart". Once items are in your cart you can check out [here](#) to complete your order.