

**Description**

outside diameter: 5/8", aluminum alloy 2024, adapter flareless tube to flared tube, MS21900 series fitting


\* Manufacturer certifications are shipped with your order FREE of charge

Order this part online

**Additional Information****Alternate Part Numbers**

[MS21900W10](#)

SKU / Model:	MS21900D10
Minimum Qty (MOQ):	1
NSN:	4730-00-640-5100
Schedule B:	7616.99.5090
ECCN:	EAR99
National Motor Freight:	051400, Pipe Fittings Aluminum

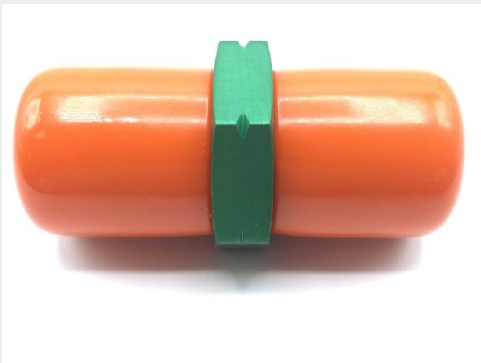

\* See page 2 for technical characteristics

## P/N MS21900D10 Specifications

<b>Thread Class:</b>	3a All Ends
<b>End Item Identification:</b>	Aircraft Application
<b>Connection Style:</b>	External Seat For Gasket Seal (boss) 2nd End
<b>Connection Style:</b>	Flared W/ Gasket Seal (boss) 1st End
<b>Connection Type:</b>	Threaded External Boss All Ends
<b>Nominal Thread Size:</b>	0.875 Inches All Ends
<b>Nominal Overall Length:</b>	1.125 Inches
<b>Material:</b>	Aluminum Alloy Overall
<b>Surface Treatment:</b>	Zinc Overall
<b>Surface Treatment Document And Classification:</b>	Qq-z-325,type 2,class 1 Fed Spec Single Treatment Response Overall
<b>Style Designator:</b>	Flared And Flareless W/ Center Wrenching Facility
<b>Thread Series Designator:</b>	Unjf All Ends
<b>Specification/standard Data:</b>	96906-ms21900 Government Standard

## How to Order

Order this boss nipple from our inventory online by visiting <https://military-fasteners.com/fittings/boss+nipples/MS21900D10> and selecting the quantity you want then click "add to cart". Once items are in your cart you can check out [here](#) to complete your order.