

**Description**

tube outside diameter: 5/16", aluminum alloy, pressure seal, flareless tube,


\* Manufacturer certifications are shipped with your order FREE of charge

Order this part online

**Additional Information****Alternate Part Numbers**

[MS21914-5D](#)

SKU / Model:	MS219145W
Minimum Qty (MOQ):	2
NSN:	4730-01-186-4740
ECCN:	EAR99
National Motor Freight:	040500, Cap / Plug (protector)

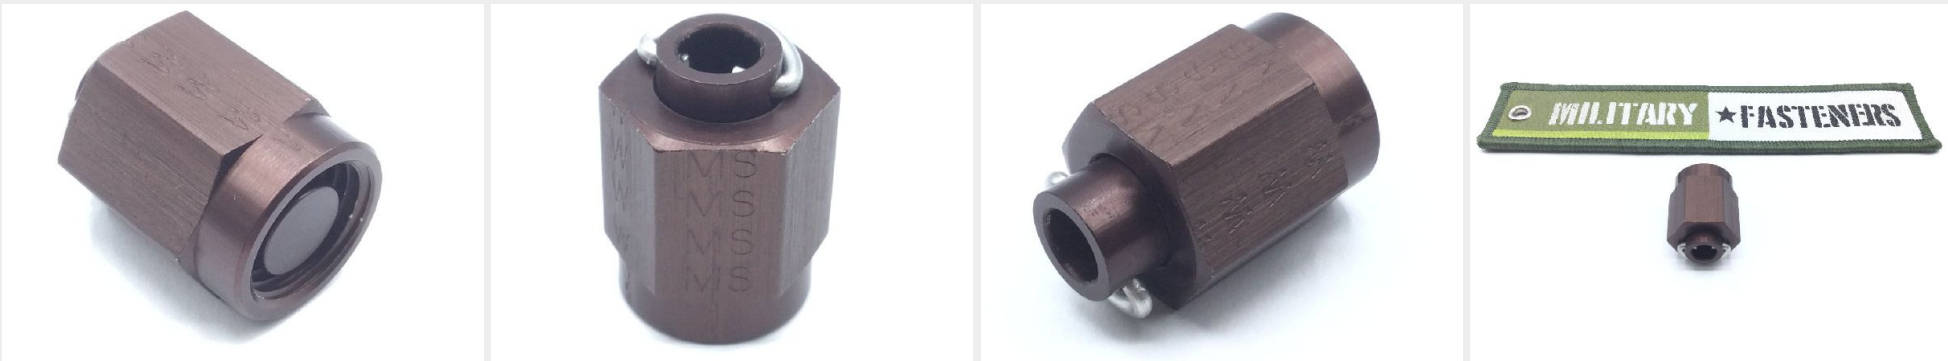

\* See page 2 for technical characteristics

## P/N MS21914-5W Specifications

<b>Thread Class:</b>	3b External
<b>Thread Direction:</b>	Right-hand External
<b>Tube Outside Diameter For Which Designed:</b>	0.312 Inches Nominal
<b>Connection Style:</b>	Pressure Seal Flareless
<b>Nominal Thread Size:</b>	0.500 Inches External
<b>Seat Nominal Radius:</b>	0.0225 Inches
<b>Material:</b>	Aluminum Alloy 7075 Overall
<b>Material Document And Classification:</b>	Qq-a-225/9,t73 Fed Spec Single Material Response Overall
<b>Surface Treatment:</b>	Anodize Overall
<b>Surface Treatment Document And Classification:</b>	Mil-a-8625,ty 2,c1 2 Mil Spec Single Treatment Response Overall
<b>Style Designator:</b>	Cap, Tube, Flareless
<b>Thread Series Designator:</b>	Unf External
<b>Specification/standard Data:</b>	96906-ms21914 Government Specification

## How to Order

Order this tube cap from our inventory online by visiting <https://military-fasteners.com/fittings/tube+caps/MS21914-5W> and selecting the quantity you want then click "add to cart". Once items are in your cart you can check out [here](#) to complete your order.