

Description

3/8" to 1/4", aluminum alloy, reducer, external thread, flareless tube


* Manufacturer certifications are shipped with your order FREE of charge

Order this part online

Additional Information**Alternate Part Numbers**

[MS21916D6-4](#)

SKU / Model:	MS21916W64
Minimum Qty (MOQ):	2
NSN:	4730-00-166-4191
Schedule B:	7609.00.0000
ECCN:	EAR99
National Motor Freight:	051400, Pipe Fittings Aluminum

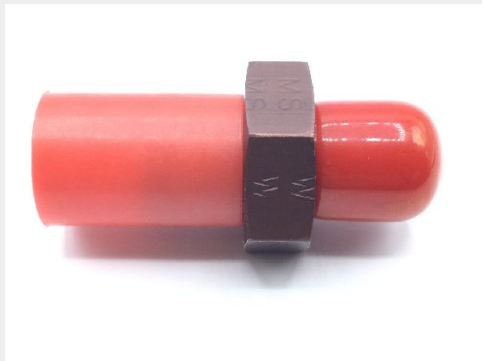

* See page 2 for technical characteristics

P/N MS21916W6-4 Specifications

Thread Class:	3a All Ends
Reducer Type:	Concentric
Connection Style:	External Seat For Gasket Seal (boss) All Ends
Connection Type:	Threaded External Boss All Ends
Maximum Operating Pressure:	3000.0 Pounds Per Square Inch Single Response
Nominal Thread Size:	0.438 Inches 2nd End
Nominal Thread Size:	0.562 Inches 1st End
Nominal Overall Length:	1.219 Inches
Material:	Aluminum Alloy Overall
Material Document And Classification:	Qq-a-250/12,alloy 7075 Fed Spec Single Material Response Overall
Media For Which Designed:	Aeronautical Fluid Single Response
Surface Treatment:	Anodize Outside
Surface Treatment Document And Classification:	Mil-a-8625 Mil Spec Single Treatment Response Outside
Thread Series Designator:	Unjf All Ends

How to Order

Order this boss reducer from our inventory online by visiting <https://military-fasteners.com/fittings/boss+reducers/MS21916W6-4> and selecting the quantity you want then click "add to cart". Once items are in your cart you can check out [here](#) to complete your order.