

Description


aluminum alloy 2024, tube outside 3/16", nut, sleeve coupling flareless

* Manufacturer certifications are shipped with your order FREE of charge

Order this part online

Additional Information

SKU / Model:	MS219213D
Minimum Qty (MOQ):	10
NSN:	4730-00-555-8195
ECCN:	EAR99
National Motor Freight:	013540, Alum Nuts

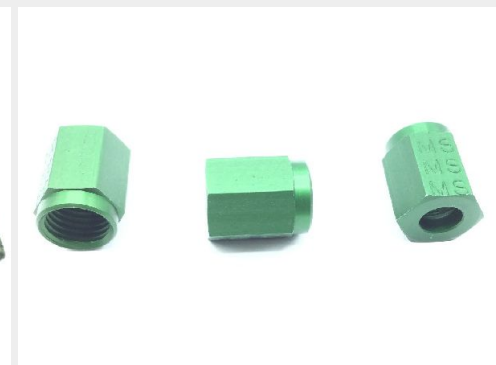

* See page 2 for technical characteristics

P/N MS21921-3D Specifications

Thread Class:	3b
Thread Direction:	Right-hand
Fabrication Method:	Any Acceptable
Nut Style:	Tube Coupling
Nut Height:	0.570 Inches Minimum And 0.590 Inches Maximum
End Item Identification:	Used On Target Ranging Antenna-receiver-transmitter Group,an/mpa-53
Width Across Flats:	0.438 Inches Nominal
Length To Shoulder:	0.419 Inches Minimum And 0.439 Inches Maximum
Smallest Inside Diameter:	0.232 Inches Nominal
Thread Series:	Unf
Thread Quantity Per Inch:	24
Nominal Thread Size:	0.375 Inches
Nominal Tube Outside Diameter:	0.188 Inches
Seat Angle:	45.00 Degrees Nominal
Material:	Aluminum Alloy 2014 Overall
Surface Treatment:	Anodize Overall
Specification/standard Data:	96906-ms21921 Government Standard

How to Order

Order this tube coupling nut from our inventory online by visiting <https://military-fasteners.com/nuts/tube+coupling+nuts/MS21921-3D> and selecting the quantity you want then click "add to cart". Once items are in your cart you can check out [here](#) to complete your order.