

Description

aluminum alloy 7075, tube od 1/2", nut, sleeve coupling, flareless


* Manufacturer certifications are shipped with your order FREE of charge

Order this part online

Additional Information**Alternate Part Numbers**

[MS21921-8D](#)

SKU / Model:	MS219218W
Minimum Qty (MOQ):	5
NSN:	4730-00-194-1726
ECCN:	EAR99
National Motor Freight:	013540, Alum Nuts

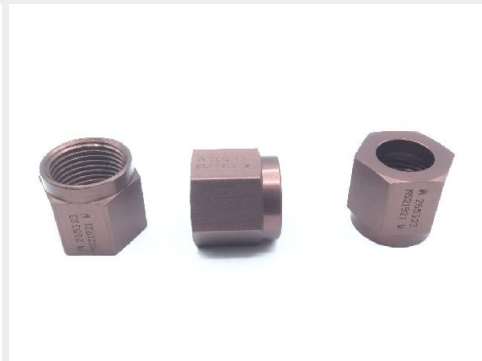

* See page 2 for technical characteristics

P/N MS21921-8W Specifications

Thread Class:	3b
Thread Direction:	Right-hand
Fabrication Method:	Any Acceptable
Nut Style:	Tube Coupling
Nut Height:	0.860 Inches Nominal
Width Across Flats:	0.875 Inches Nominal
Length To Shoulder:	0.609 Inches Nominal
Smallest Inside Diameter:	0.552 Inches Nominal
Thread Series:	Unj
Thread Quantity Per Inch:	16
Nominal Thread Size:	0.750 Inches
Nominal Tube Outside Diameter:	0.500 Inches
Seat Angle:	45.00 Degrees Nominal
Material:	Aluminum Alloy 7075 Overall
Material Document And Classification:	Qq-a-367,t73 Fed Spec Single Material Response Overall
Surface Treatment:	Anodize Overall
Specification/standard Data:	96906-ms21921 Government Standard

How to Order

Order this tube coupling nut from our inventory online by visiting <https://military-fasteners.com/nuts/tube+coupling+nuts/MS21921-8W> and selecting the quantity you want then click "add to cart". Once items are in your cart you can check out [here](#) to complete your order.