

**Description**

length: 3/16", thread: 4-40, flat head, non-structural, cadmium plated carbon steel


\* Manufacturer certifications are shipped with your order FREE of charge

Order this part online

**Additional Information****Alternate Part Numbers**

[MS24693-S1](#)

SKU / Model:	MS24693S1
Minimum Qty (MOQ):	100
NSN:	5305-00-088-9158
ECCN:	EAR99
National Motor Freight:	093486, Bolts,nuts Or Screws, Noi (sub 3)

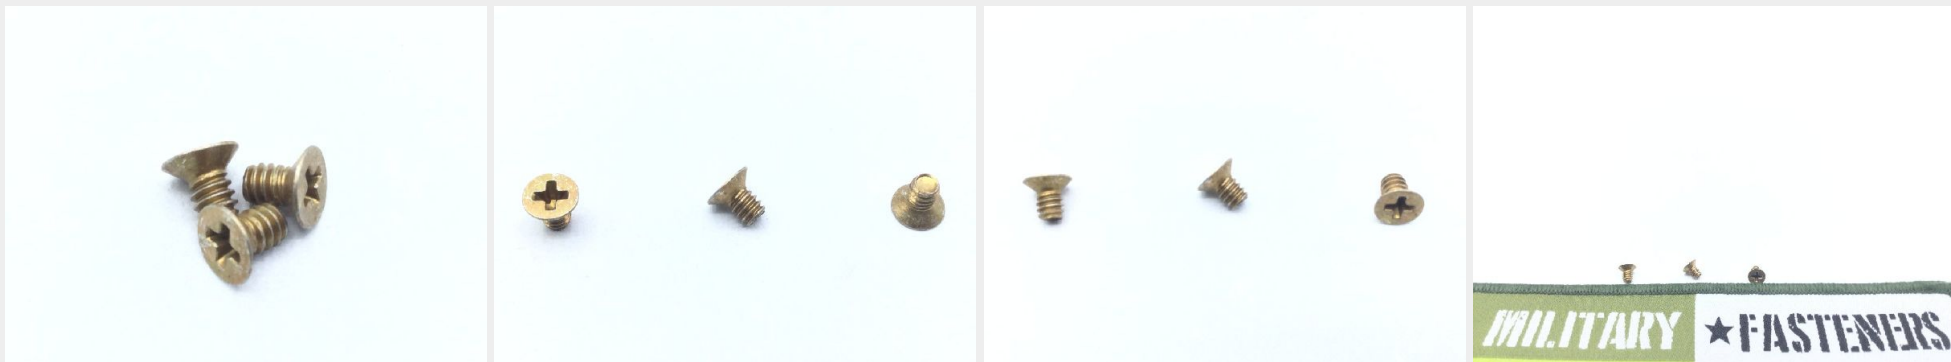

\* See page 2 for technical characteristics

# P/N MS24693S1 Specifications

<b>Thread Class:</b>	2a
<b>Thread Direction:</b>	Right-hand
<b>Thread Length:</b>	0.108 Inches Minimum And 0.139 Inches Maximum
<b>Fastener Length:</b>	0.157 Inches Minimum And 0.188 Inches Maximum
<b>Head Style:</b>	Flat Countersunk
<b>Head Diameter:</b>	0.191 Inches Minimum And 0.225 Inches Maximum
<b>Internal Drive Style:</b>	Cross Recess Type 1
<b>Nominal Thread Diameter:</b>	0.112 Inches
<b>Thread Quantity Per Inch:</b>	40
<b>Minimum Tensile Strength:</b>	60000 Pounds Per Square Inch
<b>Countersink Angle:</b>	99.0 Degrees Minimum And 101.0 Degrees Maximum
<b>Screw Material:</b>	Steel Comp 1010
<b>Screw Material Document And Classification:</b>	Qq-s-634 Fed Spec Single Material Response
<b>Screw Surface Treatment:</b>	Cadmium And Chromate
<b>Screw Surface Treatment Document And Classification:</b>	Qq-p-416,ty 2,class 3 Fed Spec Single Treatment Response
<b>Thread Series Designator:</b>	Unc
<b>Nondefinitive Spec/std Data:</b>	3 Type And 3c Style
<b>Departure From Cited Designator:</b>	As Modified By Matl

## How to Order

Order this machine screw from our inventory online by visiting <https://military-fasteners.com/screws/machine+screws/MS24693S1> and selecting the quantity you want then click "add to cart". Once items are in your cart you can check out [here](#) to complete your order.