


Description

MS27039-0833 Machine Screw

* Manufacturer certifications are shipped with your order FREE of charge[Order this part online](#)**Additional Information**

SKU / Model:	MS270390833
Minimum Qty (MOQ):	10
NSN:	5305-01-040-1612
Schedule B:	7318.15.6080
ECCN:	EAR99
National Motor Freight:	096640, Screws, Iron Or Steel

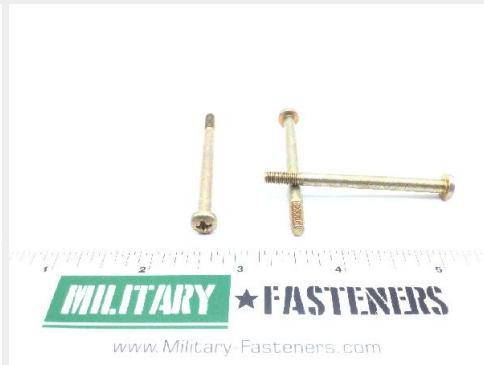

* See page 2 for technical characteristics

P/N MS27039-0833 Specifications

Thread Class:	3a
Thread Direction:	Right-hand
Thread Length:	0.438 Inches Nominal
Fastener Length:	2.094 Inches Nominal
Head Style:	Pan No. 2
Head Diameter:	0.314 Inches Nominal
Head Height:	0.110 Inches Nominal
Internal Drive Style:	Cross Recess Type Ii
Nominal Thread Diameter:	0.164 Inches
Thread Quantity Per Inch:	32
Minimum Tensile Strength:	125000 Pounds Per Square Inch
Hardness Rating:	26.0 Rockwell C Minimum And 32.0 Rockwell C Maximum
Iii Part Name Assigned By Controlling Agency:	Navy Special Project
Screw Material:	Steel Comp 8630 Or Steel Comp 4037
Screw Material Document And Classification:	Mil-s-6050 Mil Spec 1st Material Response Or Mil-s-8695 Mil Spec 2nd Material Response
Screw Surface Treatment:	Cadmium
Screw Surface Treatment Document And Classification:	Qq-p-416,type 2 Class 3 Fed Spec Single Treatment Response
Thread Series Designator:	Unc

How to Order

Order this machine screw from our inventory online by visiting <https://military-fasteners.com/screws/machine+screws/MS27039-0833> and selecting the quantity you want then click "add to cart". Once items are in your cart you can check out [here](#) to complete your order.