

**Description**


Anodized aluminum, length: 0.406", grip: 0.032", thread: 8-32, pan head structural machine screw

\* Manufacturer certifications are shipped with your order FREE of charge

Order this part online

**Additional Information**

SKU / Model:	MS27039DD106
Minimum Qty (MOQ):	50
NSN:	5305-00-905-2891
ECCN:	EAR99
National Motor Freight:	013680, Alum Screws

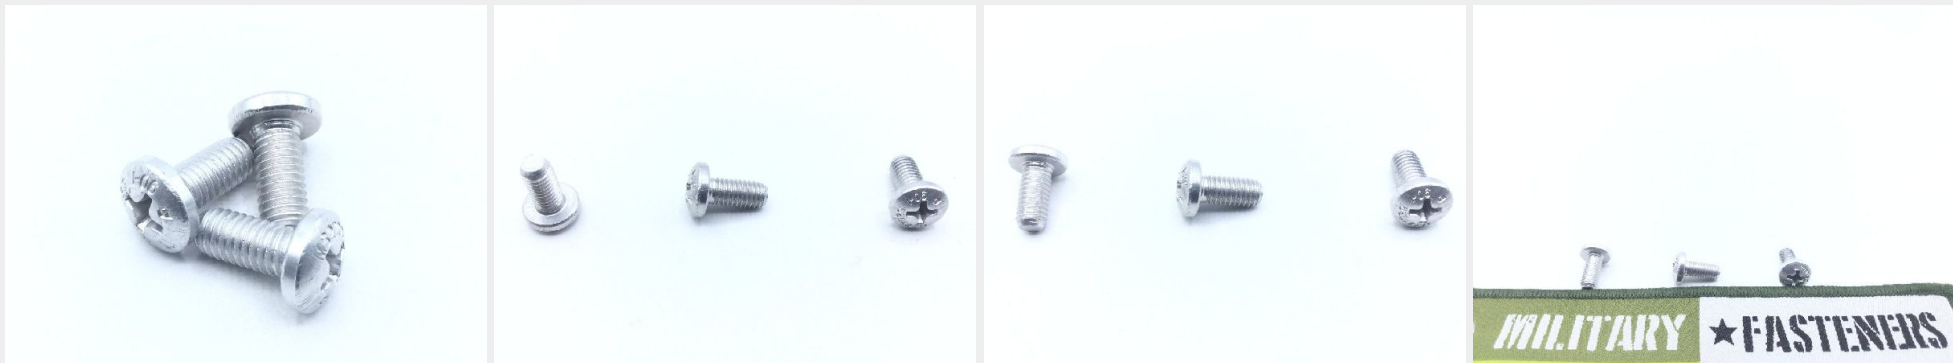

## P/N MS27039DD1-06 Specifications

<b>Thread Class:</b>	3a
<b>Thread Direction:</b>	Right-hand
<b>Thread Length:</b>	0.265 Inches Minimum And 0.403 Inches Maximum
<b>Fastener Length:</b>	0.391 Inches Minimum And 0.438 Inches Maximum
<b>Head Style:</b>	Pan
<b>Head Diameter:</b>	0.357 Inches Minimum And 0.373 Inches Maximum
<b>Head Height:</b>	0.122 Inches Minimum And 0.133 Inches Maximum
<b>Internal Drive Style:</b>	Cross Recess Type 1
<b>Nominal Thread Diameter:</b>	0.190 Inches
<b>Thread Quantity Per Inch:</b>	32
<b>Minimum Tensile Strength:</b>	62000 Pounds Per Square Inch
<b>Screw Material:</b>	Aluminum Alloy 2024
<b>Screw Material Document And Classification:</b>	Qq-a-225/6 Fed Spec Single Material Response Or Mil-w-7986 Mil Spec Single Material Response
<b>Screw Surface Treatment:</b>	Anodize
<b>Screw Surface Treatment Document And Classification:</b>	Mil-a-8625 Mil Spec Single Treatment Response
<b>Thread Series Designator:</b>	Unf

## How to Order

Order this machine screw from our inventory online by visiting <https://military-fasteners.com/screws/machine+screws/MS27039DD1-06> and selecting the quantity you want then click "add to cart". Once items are in your cart you can check out [here](#) to complete your order.