

Description


Anodized aluminum, length: 0.406", grip: 0.032", thread: 8-32, pan head structural machine screw

* Manufacturer certifications are shipped with your order FREE of charge

Order this part online

Additional Information

SKU / Model:	MS27039DD106
Minimum Qty (MOQ):	50
NSN:	5305-00-905-2891
ECCN:	EAR99
National Motor Freight:	013680, Alum Screws

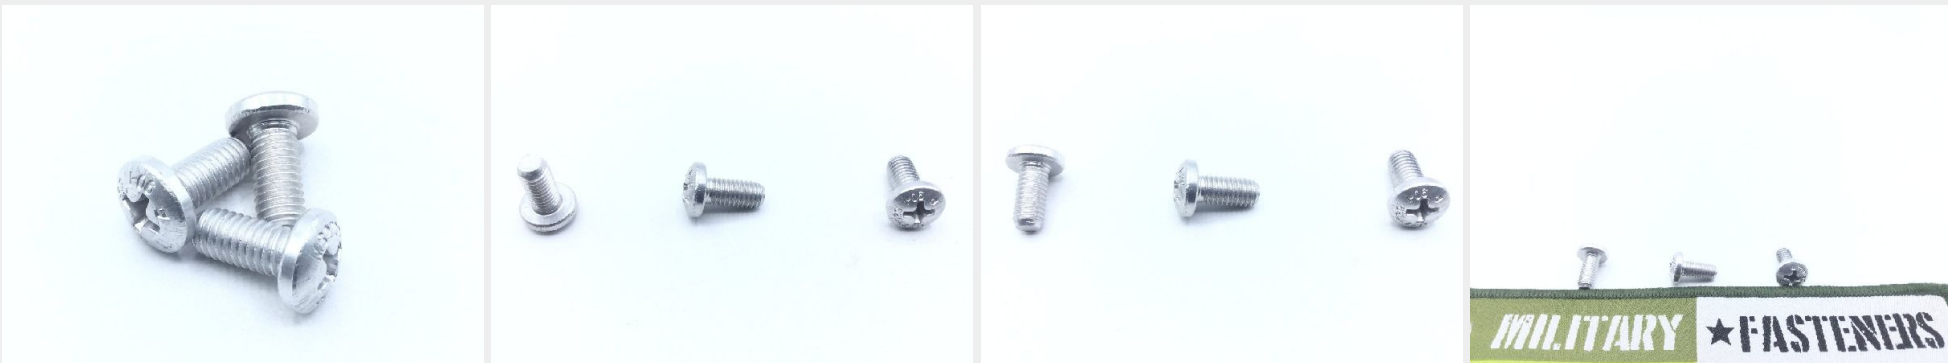

* See page 2 for technical characteristics

P/N MS27039DD1-06 Specifications

Thread Class:	3a
Thread Direction:	Right-hand
Thread Length:	0.265 Inches Minimum And 0.403 Inches Maximum
Fastener Length:	0.391 Inches Minimum And 0.438 Inches Maximum
Head Style:	Pan
Head Diameter:	0.357 Inches Minimum And 0.373 Inches Maximum
Head Height:	0.122 Inches Minimum And 0.133 Inches Maximum
Internal Drive Style:	Cross Recess Type 1
Nominal Thread Diameter:	0.190 Inches
Thread Quantity Per Inch:	32
Minimum Tensile Strength:	62000 Pounds Per Square Inch
Screw Material:	Aluminum Alloy 2024
Screw Material Document And Classification:	Qq-a-225/6 Fed Spec Single Material Response Or Mil-w-7986 Mil Spec Single Material Response
Screw Surface Treatment:	Anodize
Screw Surface Treatment Document And Classification:	Mil-a-8625 Mil Spec Single Treatment Response
Thread Series Designator:	Unf

How to Order

Order this machine screw from our inventory online by visiting <https://military-fasteners.com/screws/machine+screws/MS27039DD1-06> and selecting the quantity you want then click "add to cart". Once items are in your cart you can check out [here](#) to complete your order.