


Description

Fastener Length: 3/4", Thread: 6-40, Thread Length: 21/32

* Manufacturer certifications are shipped with your order FREE of charge[Order this part online](#)**Additional Information**

SKU / Model:	MS35191241
Minimum Qty (MOQ):	25
NSN:	5305-00-922-3982
ECCN:	EAR99
National Motor Freight:	093486, Bolts,nuts Or Screws, Noi (sub 3)

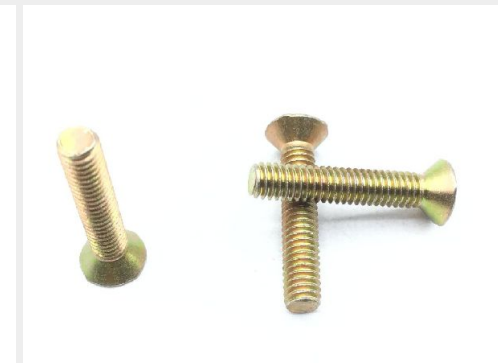

P/N MS35191-241 Specifications

Thread Class:	2a
Thread Direction:	Right-hand
Thread Length:	0.586 Inches Minimum And 0.667 Inches Maximum
Fastener Length:	0.719 Inches Minimum And 0.750 Inches Maximum
Head Style:	Flat Countersunk
Head Diameter:	0.244 Inches Minimum And 0.279 Inches Maximum
Internal Drive Style:	Cross Recess Type 1
Nominal Thread Diameter:	0.138 Inches
Thread Quantity Per Inch:	40
Countersink Angle:	80.0 Degrees Minimum And 82.0 Degrees Maximum
Screw Material:	Steel Comp 1010 Or Steel Comp 1011 Or Steel Comp 1013
Screw Surface Treatment:	Cadmium And Chromate
Screw Surface Treatment Document And Classification:	Qq-p-416,type 2,class 3 Fed Spec All Treatment Responses
Thread Series Designator:	Unf
Nondefinitive Spec/std Data:	3 Type And 2c Style
Departure From Cited Designator:	As Modified By Material

How to Order

Order this machine screw from our inventory online by visiting <https://military-fasteners.com/screws/machine+screws/MS35191-241> and selecting the quantity you want then click "add to cart". Once items are in your cart you can check out [here](#) to complete your order.