

Description


length: 1-1/8", thread: 8-32, pan head, cadmium plated carbon steel, coarse thread

* Manufacturer certifications are shipped with your order FREE of charge

Order this part online

Additional Information

| | |
|-------------------------|---|
| SKU / Model: | MS35206332 |
| Minimum Qty (MOQ): | 100 |
| NSN: | 5305-00-455-6840 |
| ECCN: | EAR99 |
| National Motor Freight: | 093486, Bolts,nuts Or Screws, Noi (sub 3) |

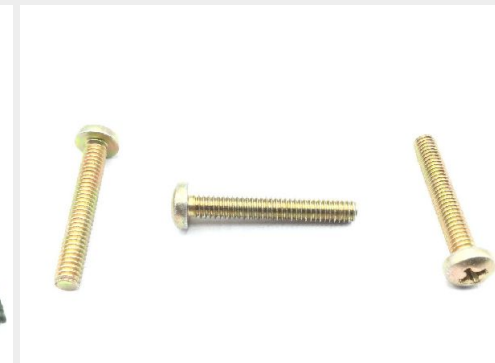

* See page 2 for technical characteristics

P/N MS35206-332 Specifications

| | |
|---|---|
| Thread Class: | 2a |
| Thread Direction: | Right-hand |
| Thread Length: | 1.001 Inches Minimum And 1.125 Inches Maximum |
| Fastener Length: | 1.063 Inches Minimum And 1.125 Inches Maximum |
| Head Style: | Pan |
| Head Diameter: | 0.306 Inches Minimum And 0.322 Inches Maximum |
| Head Height: | 0.105 Inches Minimum And 0.115 Inches Maximum |
| Internal Drive Style: | Cross Recess Type 1 |
| Nominal Thread Diameter: | 0.164 Inches |
| Thread Quantity Per Inch: | 32 |
| Minimum Tensile Strength: | 60000 Pounds Per Square Inch |
| Screw Material: | Steel |
| Screw Material Document And Classification: | Astm A108 Assn Std 1st Material Response Or Qq-s-637 Fed Spec 2nd Material Response Or Fed Std No. 66 Fed Std 3rd Material Response |
| Screw Surface Treatment Document And Classification: | Qq-p-416 Ty 2 Cl 3 Fed Spec All Treatment Responses |
| Thread Series Designator: | Unc |
| Nondefinitive Spec/std Data: | 3 Type Or 9c Style |
| Departure From Cited Designator: | As Modified By Material |

How to Order

Order this machine screw from our inventory online by visiting <https://military-fasteners.com/screws/machine+screws/MS35206-332> and selecting the quantity you want then click "add to cart". Once items are in your cart you can check out [here](#) to complete your order.