

Description


length: 1-1/8", thread: 8-32, pan head, cadmium plated carbon steel, coarse thread

* Manufacturer certifications are shipped with your order FREE of charge

Order this part online

Additional Information

SKU / Model:	MS35206332
Minimum Qty (MOQ):	100
NSN:	5305-00-455-6840
ECCN:	EAR99
National Motor Freight:	093486, Bolts,nuts Or Screws, Noi (sub 3)

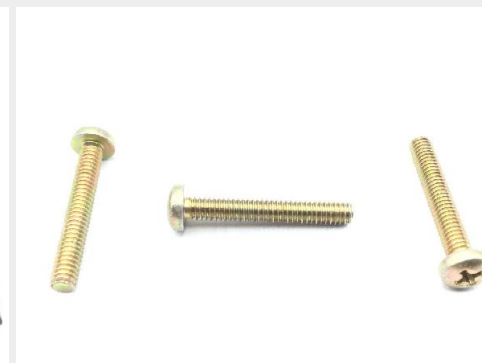

* See page 2 for technical characteristics

P/N MS35206-332 Specifications

Thread Class:	2a
Thread Direction:	Right-hand
Thread Length:	1.001 Inches Minimum And 1.125 Inches Maximum
Fastener Length:	1.063 Inches Minimum And 1.125 Inches Maximum
Head Style:	Pan
Head Diameter:	0.306 Inches Minimum And 0.322 Inches Maximum
Head Height:	0.105 Inches Minimum And 0.115 Inches Maximum
Internal Drive Style:	Cross Recess Type 1
Nominal Thread Diameter:	0.164 Inches
Thread Quantity Per Inch:	32
Minimum Tensile Strength:	60000 Pounds Per Square Inch
Screw Material:	Steel
Screw Material Document And Classification:	Astm A108 Assn Std 1st Material Response Or Qq-s-637 Fed Spec 2nd Material Response Or Fed Std No. 66 Fed Std 3rd Material Response
Screw Surface Treatment Document And Classification:	Qq-p-416 Ty 2 Cl 3 Fed Spec All Treatment Responses
Thread Series Designator:	Unc
Nondefinitive Spec/std Data:	3 Type Or 9c Style
Departure From Cited Designator:	As Modified By Material

How to Order

Order this machine screw from our inventory online by visiting <https://military-fasteners.com/screws/machine+screws/MS35206-332> and selecting the quantity you want then click "add to cart". Once items are in your cart you can check out [here](#) to complete your order.