


Description

length: 1/4", MS51861 series screw

* Manufacturer certifications are shipped with your order FREE of charge[Order this part online](#)**Additional Information****Alternate Part Numbers**[MS24617-1](#)

SKU / Model:	MS5186112
Minimum Qty (MOQ):	100
NSN:	5305-00-140-8001
Schedule B:	7318.15.6080
ECCN:	EAR99
National Motor Freight:	093486, Bolts,nuts Or Screws, Noi (sub 3)

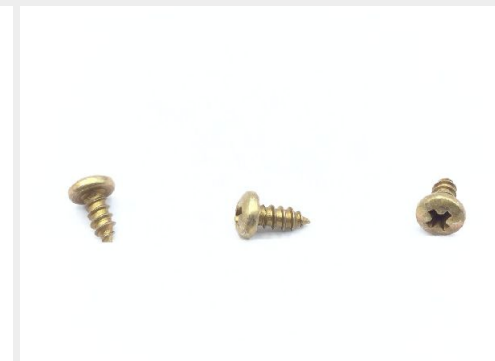

* See page 2 for technical characteristics

P/N MS51861-12 Specifications

Fastener Length:	0.250 Inches Minimum And 0.281 Inches Maximum
Head Style:	Pan
Head Diameter:	0.205 Inches Minimum And 0.219 Inches Maximum
Head Height:	0.070 Inches Minimum And 0.080 Inches Maximum
Internal Drive Style:	Cross Recess Type 1
Features Provided:	Casehardened
Nonmachine Thread Style:	Gimlet Point (type A, Ab Or Ba)
Nonmachine Nominal Thread Diameter:	0.112 Inches
Material:	Steel Overall
Surface Treatment:	Cadmium Overall And Chromate Overall
Surface Treatment Document And Classification:	Qq-p-416,type 2,class 3 Fed Spec Single Treatment Response Overall
Nondefinitive Spec/std Data:	Ab Type

How to Order

Order this tapping screw from our inventory online by visiting <https://military-fasteners.com/screws/tapping+screws/MS51861-12> and selecting the quantity you want then click "add to cart". Once items are in your cart you can check out [here](#) to complete your order.