

Description

length: 3/8", thread: 8-18, pan head tapping screw type a point


* Manufacturer certifications are shipped with your order FREE of charge

Order this part online

Additional Information**Alternate Part Numbers**

[AN530-8R6](#)

SKU / Model:	MS5186134
Minimum Qty (MOQ):	100
NSN:	5305-00-058-1082
ECCN:	EAR99
National Motor Freight:	093486, Bolts,nuts Or Screws, Noi (sub 3)

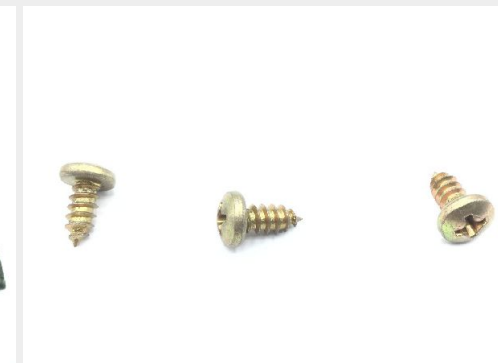

* See page 2 for technical characteristics

P/N MS51861-34 Specifications

Fastener Length:	0.344 Inches Minimum And 0.406 Inches Maximum
Head Style:	Pan
Head Diameter:	0.306 Inches Minimum And 0.322 Inches Maximum
Head Height:	0.105 Inches Minimum And 0.115 Inches Maximum
Internal Drive Style:	Cross Recess Type 1
Nonmachine Thread Style:	Gimlet Point (type A, Ab Or Ba)
Nonmachine Nominal Thread Diameter:	0.164 Inches
Material:	Steel Overall
Surface Treatment:	Zinc Overall
Surface Treatment Document And Classification:	Astm B633 Assn Std All Treatment Responses Overall

How to Order

Order this tapping screw from our inventory online by visiting <https://military-fasteners.com/screws/tapping+screws/MS51861-34> and selecting the quantity you want then click "add to cart". Once items are in your cart you can check out [here](#) to complete your order.