

Description


Fastener Length: 1/4", Thread: 8-32, Head Width: 5/64", Thread Length: 1/4",

* Manufacturer certifications are shipped with your order FREE of charge

Order this part online

Additional Information

SKU / Model:	NAS1081C08A4
Minimum Qty (MOQ):	25
NSN:	5305-00-227-7580
Schedule B:	7318.15.6080
ECCN:	EAR99
National Motor Freight:	093486, Bolts,nuts Or Screws, Noi (sub 3)

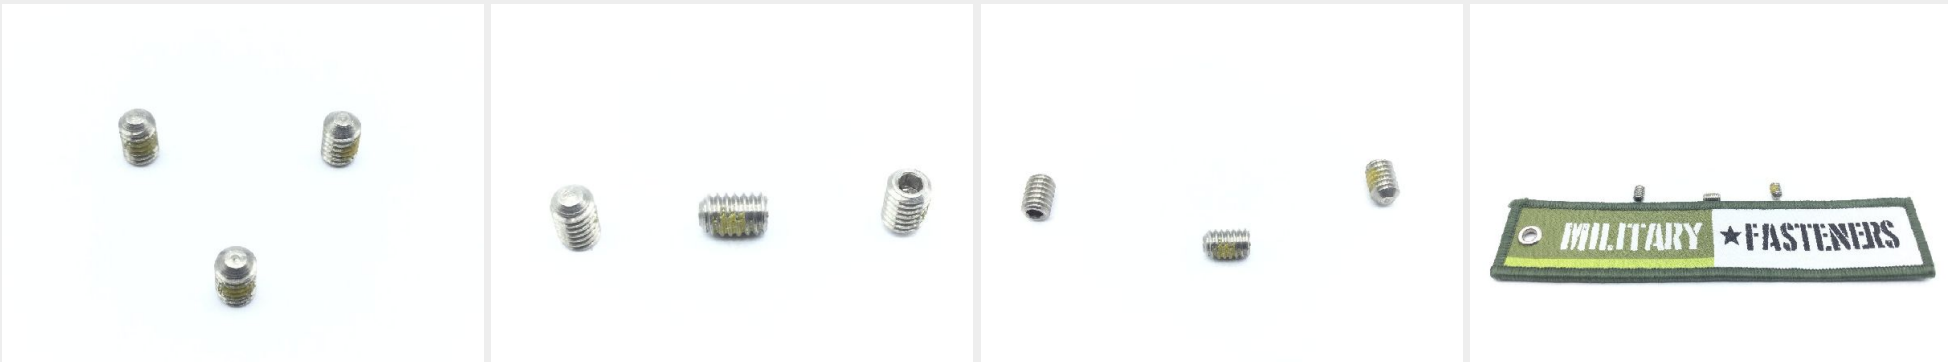

P/N NAS1081C08A4 Specifications

Thread Class:	3a
Thread Direction:	Right-hand
Thread Length:	0.240 Inches Minimum And 0.260 Inches Maximum
Fastener Length:	0.240 Inches Minimum And 0.250 Inches Maximum
Head Style:	Headless (setscrew)
Point Style:	Flat
Internal Drive Style:	Hexagon
Nominal Thread Diameter:	0.164 Inches
Width Across Flats:	0.0781 Inches Minimum And 0.0791 Inches Maximum
Thread Quantity Per Inch:	32
Hardness Rating:	35.0 Rockwell C Minimum Overall And 45.0 Rockwell C Maximum Overall
Material Document And Classification:	Mil-s-7720 Mil Spec 1st Material Response Overall Or Mil-s-18732 Mil Spec 2nd Material Response Overall
Surface Treatment:	Passivate Overall
Surface Treatment Document And Classification:	Q-p-35 Fed Spec Single Treatment Response Overall
Thread Series Designator:	Unc
Specification/standard Data:	80205-nas1081 Professional/industrial Association Standard

How to Order

Order this setscrew from our inventory online by visiting <https://military-fasteners.com/screws/setscrews/NAS1081C08A4> and selecting the quantity you want then click "add to cart". Once items are in your cart you can check out [here](#) to complete your order.