

**Description**


Fastener Length: 0.370", Thread: 8-32, Thread Length: 0.370", flat countersunk head, NAS1189 series bolt

\* Manufacturer certifications are shipped with your order FREE of charge

Order this part online

**Additional Information**

SKU / Model:	NAS1189E08T7J
Minimum Qty (MOQ):	10
NSN:	5305-01-546-1705
Schedule B:	7318.15.6080
ECCN:	EAR99

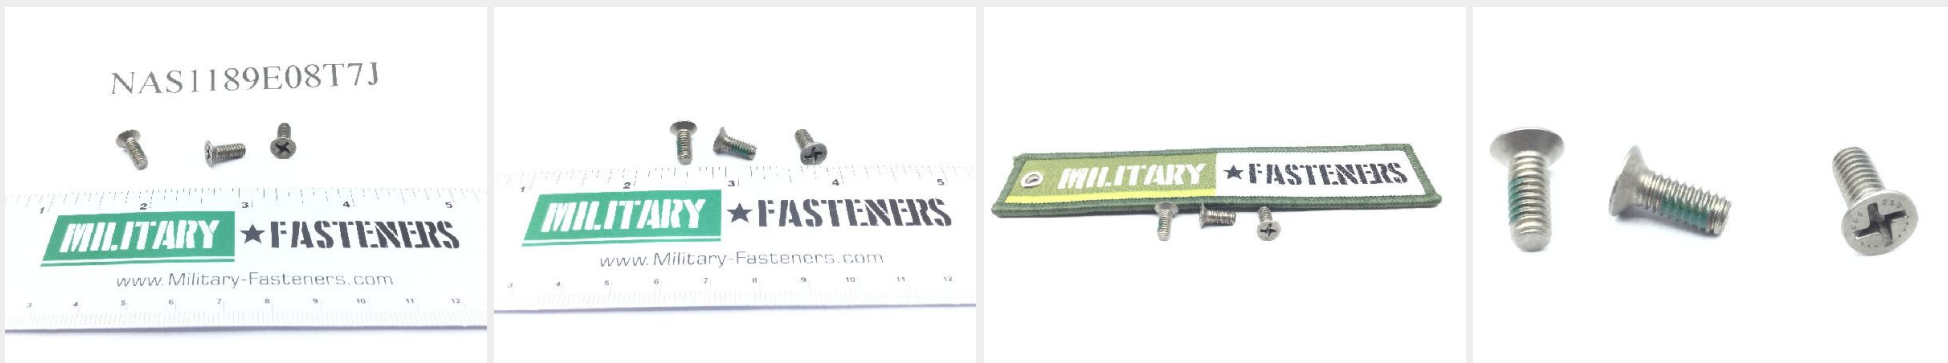

\* See page 2 for technical characteristics

## P/N NAS1189E08T7J Specifications

<b>Thread Class:</b>	3a
<b>Thread Direction:</b>	Right-hand
<b>Thread Length:</b>	0.370 Inches Maximum
<b>Fastener Length:</b>	0.370 Inches Maximum
<b>Head Style:</b>	Flat Countersunk
<b>Head Diameter:</b>	0.319 Inches Minimum And 0.332 Inches Maximum
<b>Head Height:</b>	0.068 Inches Nominal
<b>Locking Feature:</b>	Patch Grip
<b>Internal Drive Style:</b>	Offset Cruciform (torque Set)
<b>Nominal Thread Diameter:</b>	0.164 Inches
<b>Thread Quantity Per Inch:</b>	32
<b>Minimum Tensile Strength:</b>	160000 Pounds Per Square Inch
<b>Countersink Angle:</b>	99.0 Degrees Minimum And 101.0 Degrees Maximum
<b>Material:</b>	Plastic Polyethylene Locking Feature
<b>Material:</b>	Steel Corrosion Resisting Overall
<b>Surface Treatment:</b>	Passivate Overall
<b>Surface Treatment Document And Classification:</b>	Qq-p-35 Fed Spec Single Treatment Response Overall
<b>Thread Series Designator:</b>	Unjc

## How to Order

Order this socket head cap screw from our inventory online by visiting <https://military-fasteners.com/bolts/close+tolerance+bolts/NAS1189E08T7J> and selecting the quantity you want then click "add to cart". Once items are in your cart you can check out [here](#) to complete your order.