



★ FASTENERS

Military-Fasteners.com

P/N NAS1189E08T7J

Description


Fastener Length: 0.370", Thread: 8-32, Thread Length: 0.370", flat countersunk head, NAS1189 series bolt

* Manufacturer certifications are shipped with your order FREE of charge

Order this part online

Additional Information

SKU / Model:	NAS1189E08T7J
Minimum Qty (MOQ):	10
NSN:	5305-01-546-1705
Schedule B:	7318.15.6080
ECCN:	EAR99

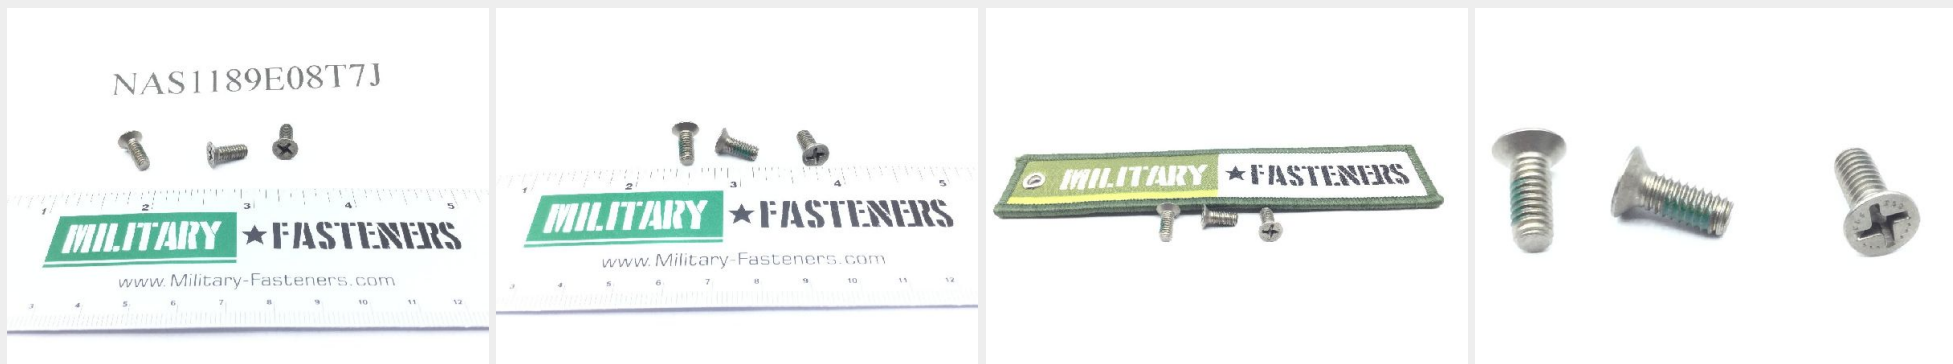

* See page 2 for technical characteristics

P/N NAS1189E08T7J Specifications

Thread Class:	3a
Thread Direction:	Right-hand
Thread Length:	0.370 Inches Maximum
Fastener Length:	0.370 Inches Maximum
Head Style:	Flat Countersunk
Head Diameter:	0.319 Inches Minimum And 0.332 Inches Maximum
Head Height:	0.068 Inches Nominal
Locking Feature:	Patch Grip
Internal Drive Style:	Offset Cruciform (torque Set)
Nominal Thread Diameter:	0.164 Inches
Thread Quantity Per Inch:	32
Minimum Tensile Strength:	160000 Pounds Per Square Inch
Countersink Angle:	99.0 Degrees Minimum And 101.0 Degrees Maximum
Material:	Plastic Polyethylene Locking Feature
Material:	Steel Corrosion Resisting Overall
Surface Treatment:	Passivate Overall
Surface Treatment Document And Classification:	Qq-p-35 Fed Spec Single Treatment Response Overall
Thread Series Designator:	Unjc

How to Order

Order this socket head cap screw from our inventory online by visiting <https://military-fasteners.com/bolts/close+tolerance+bolts/NAS1189E08T7J> and selecting the quantity you want then click "add to cart". Once items are in your cart you can check out [here](#) to complete your order.