


Description

Fastener Length: 11/16", Thread: 1/4-28, Thread Length: 27/64

* Manufacturer certifications are shipped with your order FREE of charge[Order this part online](#)**Additional Information**

| | |
|-------------------------|-------------------------------|
| SKU / Model: | NAS1221R4E4 |
| Minimum Qty (MOQ): | 10 |
| NSN: | 5305-01-365-1910 |
| Schedule B: | 7318.15.8085 |
| ECCN: | EAR99 |
| National Motor Freight: | 096640, Screws, Iron Or Steel |

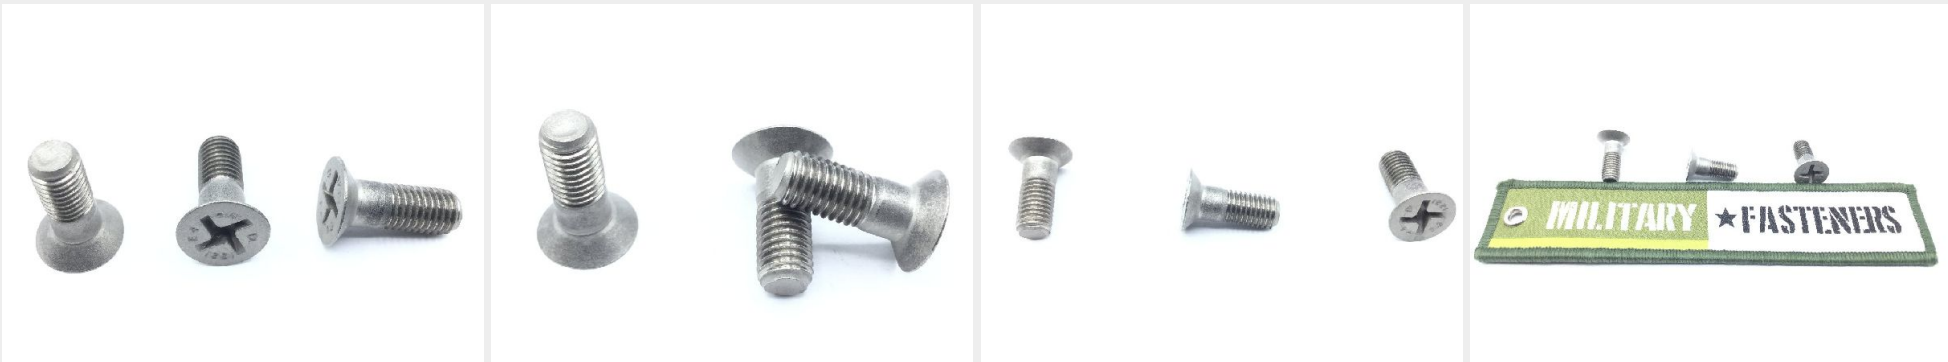

* See page 2 for technical characteristics

P/N NAS1221R4E4 Specifications

| | |
|---|---|
| Thread Class: | 3a |
| Thread Direction: | Right-hand |
| Thread Length: | 0.425 Inches Nominal |
| Fastener Length: | 0.661 Inches Minimum And 0.691 Inches Maximum |
| Head Style: | Flat Countersunk |
| Head Diameter: | 0.461 Inches Minimum And 0.507 Inches Maximum |
| Internal Drive Style: | Torque-set Ribbed |
| Nominal Thread Diameter: | 0.250 Inches |
| Thread Quantity Per Inch: | 28 |
| Minimum Tensile Strength: | 160000 Pounds Per Square Inch |
| Countersink Angle: | 99.0 Degrees Minimum And 101.0 Degrees Maximum |
| Part Name Assigned By Controlling Agency: | Navy Special Project |
| Screw Material: | Iron Alloy 660 |
| Screw Material Document And Classification: | Ama5731 Assn Std Single Material Response Or Ama5732 Assn Std Single Material Response Or Ams5737 Assn Std Single Material Response |
| Screw Surface Treatment: | Passivate |
| Screw Surface Treatment Document And Classification: | Qq-p-35 Fed Spec Single Treatment Response |
| Thread Series Designator: | Unjf |
| Specification/standard Data: | 80205-nas1221 Professional/industrial Association Standard |

How to Order

Order this close tolerance bolt from our inventory online by visiting <https://military-fasteners.com/bolts/close+tolerance+bolts/NAS1221R4E4> and selecting the quantity you want then click "add to cart". Once items are in your cart you can check out [here](#) to complete your order.