


**Description**

Hole Diameter: 3/4", Diameter: 1-3/8

\* Manufacturer certifications are shipped with your order FREE of charge[Order this part online](#)**Additional Information**

SKU / Model:	NAS12521216L
Minimum Qty (MOQ):	25
NSN:	5310-01-342-2743
ECCN:	EAR99
National Motor Freight:	093486, Bolts,nuts Or Screws, Noi (sub 3)

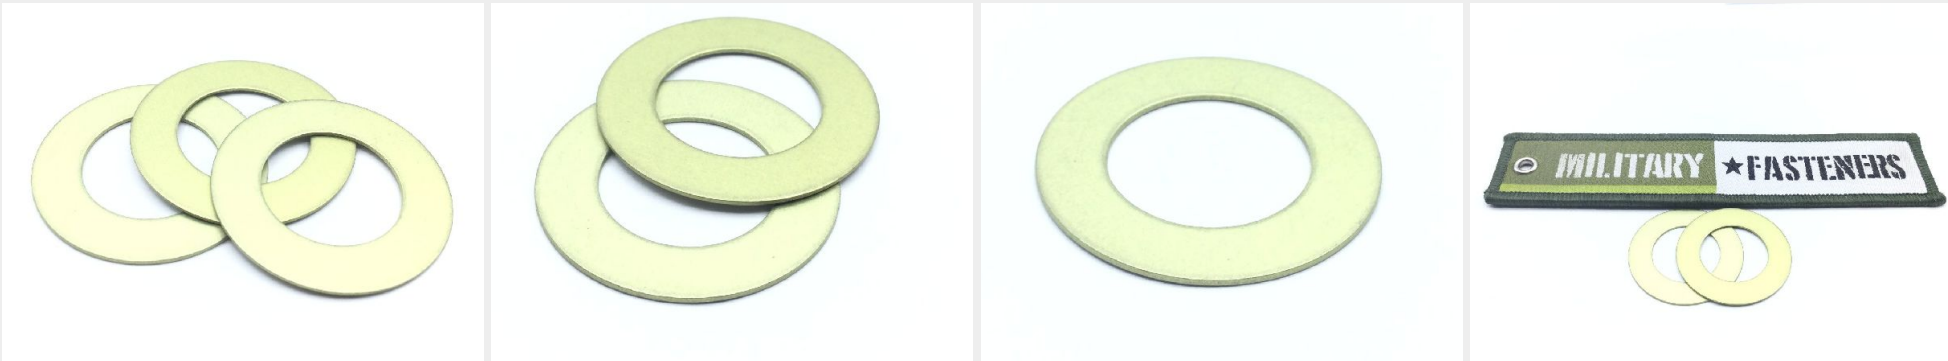

## P/N NAS1252-1216L Specifications

<b>Cross-sectional Shape Style:</b>	Rectangular
<b>Hole Diameter:</b>	0.755 Inches Minimum And 0.775 Inches Maximum
<b>Peripheral Shape Style:</b>	Round
<b>Center Hole Shape Style:</b>	1 Round
<b>Thickness:</b>	0.028 Inches Minimum And 0.036 Inches Maximum
<b>Overall Diameter:</b>	1.307 Inches Minimum And 1.332 Inches Maximum
<b>Color:</b>	Yellow Overall
<b>Material:</b>	Aluminum Alloy 7075 Overall
<b>Material Document And Classification:</b>	Qq-a-250/12,t6 Fed Spec Single Material Response Overall
<b>Surface Treatment:</b>	Anodize Overall
<b>Surface Treatment Document And Classification:</b>	Mil-a-8625,ty 2,cl 2 Mil Spec Single Treatment Response Overall
<b>Specification/standard Data:</b>	80205-nas1252 Professional/industrial Association Standard

## How to Order

Order this flat washer from our inventory online by visiting <https://military-fasteners.com/washers/flat+washers/NAS1252-1216L> and selecting the quantity you want then click "add to cart". Once items are in your cart you can check out [here](#) to complete your order.