


Description

Hole Diameter: 3/4", Diameter: 1-3/8

* Manufacturer certifications are shipped with your order FREE of charge[Order this part online](#)**Additional Information**

SKU / Model:	NAS12521216L
Minimum Qty (MOQ):	25
NSN:	5310-01-342-2743
ECCN:	EAR99
National Motor Freight:	093486, Bolts,nuts Or Screws, Noi (sub 3)

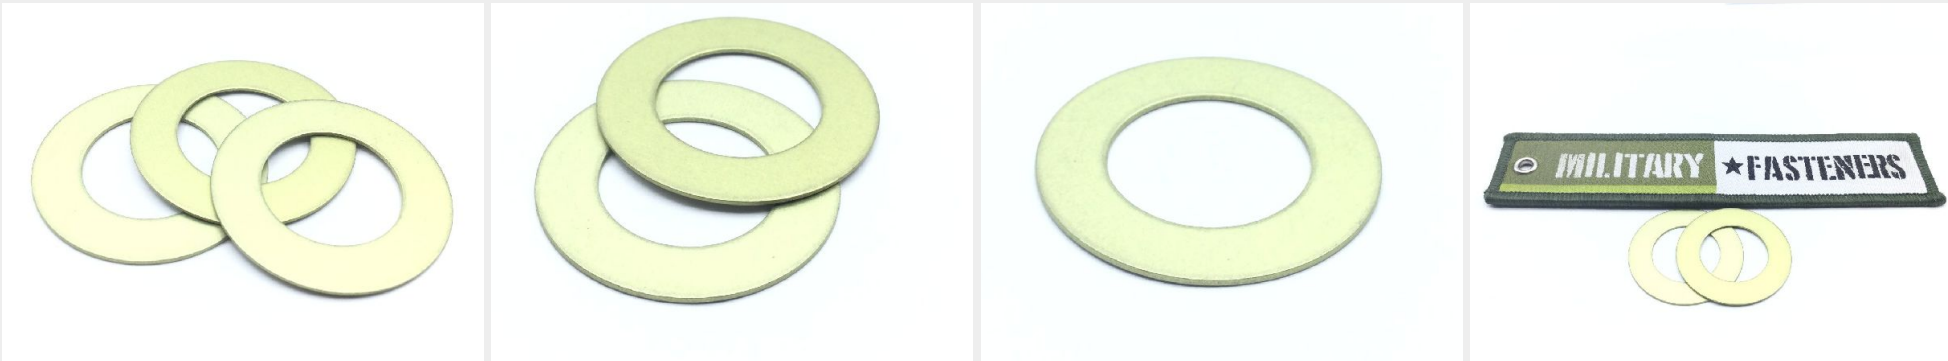

P/N NAS1252-1216L Specifications

Cross-sectional Shape Style:	Rectangular
Hole Diameter:	0.755 Inches Minimum And 0.775 Inches Maximum
Peripheral Shape Style:	Round
Center Hole Shape Style:	1 Round
Thickness:	0.028 Inches Minimum And 0.036 Inches Maximum
Overall Diameter:	1.307 Inches Minimum And 1.332 Inches Maximum
Color:	Yellow Overall
Material:	Aluminum Alloy 7075 Overall
Material Document And Classification:	Qq-a-250/12,t6 Fed Spec Single Material Response Overall
Surface Treatment:	Anodize Overall
Surface Treatment Document And Classification:	Mil-a-8625,ty 2,cl 2 Mil Spec Single Treatment Response Overall
Specification/standard Data:	80205-nas1252 Professional/industrial Association Standard

How to Order

Order this flat washer from our inventory online by visiting <https://military-fasteners.com/washers/flat+washers/NAS1252-1216L> and selecting the quantity you want then click "add to cart". Once items are in your cart you can check out [here](#) to complete your order.