

Description



grip range: 0.407" - 0.469", diameter: 0.200", general purpose, protruding head, internally threaded, external sleeve with drive nut, jo-bolt, NAS1669 series rivet

* Manufacturer certifications are shipped with your order FREE of charge

Order this part online

Additional Information

SKU / Model:	NAS16693DL7
Minimum Qty (MOQ):	10
NSN:	5320-01-307-1772
Schedule B:	7318.15.2095
ECCN:	EAR99
National Motor Freight:	106510, Rivets I / S Plain / Galvanized Etc

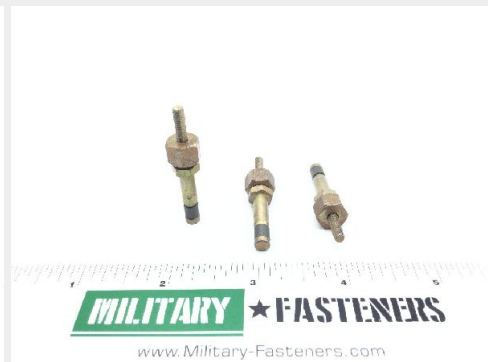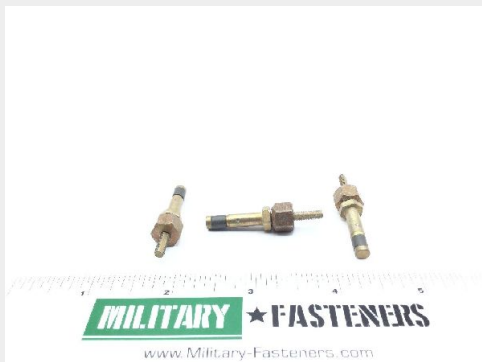

* See page 2 for technical characteristics

P/N NAS1669-3DL7 Specifications

Shank Diameter:	0.1970 Inches Minimum And 0.1990 Inches Maximum
Features Provided:	Drive Nut
Material:	Steel Comp 303 Sleeve Or Steel Comp 304 Sleeve Or Steel Comp 303se Sleeve
Material:	Steel Comp 4130 Nut Or Steel Comp 4140 Nut Or Steel Comp 8740 Nut
Material Document And Classification:	Astm A582 Assn Std 1st Material Response Sleeve Or Ams 5639 Assn Std 2nd Material Response Sleeve Or Ams 5641 Assn Std 3rd Material Response Sleeve
Material Document And Classification:	Mil-s-6758 Mil Spec 1st Material Response Nut Or Mil-s-5626 Mil Spec 2nd Material Response Nut Or Mil-s-6049 Mil Spec 3rd Material Response Nut
Surface Treatment:	Cadmium Bolt And Chromate Bolt
Surface Treatment:	Cadmium Nut And Chromate Nut
Surface Treatment:	Passivate Sleeve And Cadmium Sleeve
Surface Treatment Document And Classification:	Qq-p-35 Fed Spec 1st Treatment Response Sleeve And Qq-p-416,ty1,cl3 Fed Spec 2nd Treatment Response Sleeve
Surface Treatment Document And Classification:	Qq-p-416,ty2,cl2 Fed Spec Single Treatment Response Nut
Specification/standard Data:	80205-nas1669 Professional/industrial Association Standard

How to Order

Order this blind rivet from our inventory online by visiting <https://military-fasteners.com/rivets/blind+rivets/NAS1669-3DL7> and selecting the quantity you want then click "add to cart". Once items are in your cart you can check out [here](#) to complete your order.