

**Description**


Fastener Length: 3/8", NAS1921 series rivet

\* Manufacturer certifications are shipped with your order FREE of charge

Order this part online

**Additional Information**

SKU / Model:	NAS1921M0404W
Minimum Qty (MOQ):	20
NSN:	5320-00-937-4984
Schedule B:	7508.90.5000
ECCN:	9A991
National Motor Freight:	013630, Alum Rivets

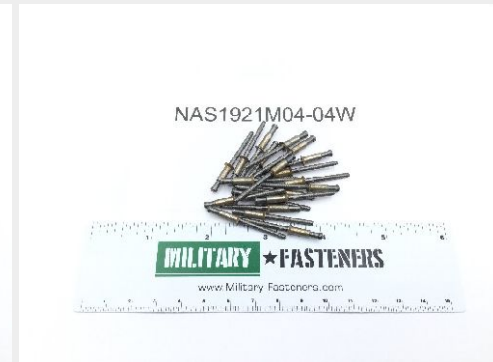

\* See page 2 for technical characteristics

# P/N NAS1921M04-04W Specifications

<b>Fastener Length:</b>	0.385 Inches Maximum
<b>Head Style:</b>	Flush (flat) Countersunk (included Angle - Less Than 135 Deg W Or W/o Chamfer)
<b>Shank Diameter:</b>	0.124 Inches Minimum And 0.128 Inches Maximum
<b>Shank Style:</b>	Self-plugging Mechanically Locked Stem
<b>Head Major Diameter:</b>	0.221 Inches Minimum And 0.228 Inches Maximum
<b>Expansion Device:</b>	Serrated Stem-type W
<b>Grip Length:</b>	0.188 Inches Minimum And 0.250 Inches Maximum
<b>Shear Strength:</b>	1020 Single Pounds Per Square Inch
<b>Countersink Angle:</b>	98.5 Degrees Minimum And 101.5 Degrees Maximum
<b>Material:</b>	Iron Alloy 660 Locking Ring Or Nickel Alloy 400 Locking Ring Or Nickel Alloy R-405 Locking Ring
<b>Material:</b>	Iron Alloy 660 Stem
<b>Material:</b>	Nickel Alloy 400 Sleeve Or Nickel Alloy R-405 Sleeve
<b>Material Document And Classification:</b>	Ams 5737 Assn Std 1st Material Response Locking Ring Or Qq-n-281 Fed Spec 2nd Material Response Locking Ring Or Qq-n-281 Fed Spec 3rd Material Response Locking Ring
<b>Material Document And Classification:</b>	Ams 5737 Assn Std Single Material Response Stem
<b>Material Document And Classification:</b>	Qq-n-281 Fed Spec All Material Responses Sleeve
<b>Surface Treatment:</b>	Cadmium Sleeve And Chromate Sleeve Or Aluminum Alloy Sleeve
<b>Surface Treatment:</b>	Passivate Locking Ring
<b>Surface Treatment:</b>	Passivate Stem
<b>Surface Treatment Document And Classification:</b>	Qq-p-35 For A286 Cres Only Fed Spec Single Treatment Response Locking Ring
<b>Surface Treatment Document And Classification:</b>	Qq-p-35 Fed Spec Single Treatment Response Stem
<b>Surface Treatment Document And Classification:</b>	Qq-p-416,ty 2,cl 3 Fed Spec 1st Treatment Response Sleeve Or Nas 4006 Assn Std 2nd Treatment Response Sleeve
<b>Specification/standard Data:</b>	80205-nas1921 Professional/industrial Association Standard

## How to Order

Order this blind rivet from our inventory online by visiting <https://military-fasteners.com/rivets/blind+rivets/NAS1921M04-04W> and selecting the quantity you want then click "add to cart". Once items are in your cart you can check out [here](#) to complete your order.