


Description

Fastener Length: 15/16", Thread: 1/4-24, Thread Length: 7/16

* Manufacturer certifications are shipped with your order FREE of charge[Order this part online](#)**Additional Information**

SKU / Model:	NAS62058H
Minimum Qty (MOQ):	10
NSN:	5306-01-463-1350
Schedule B:	7318.15.8085
ECCN:	EAR99

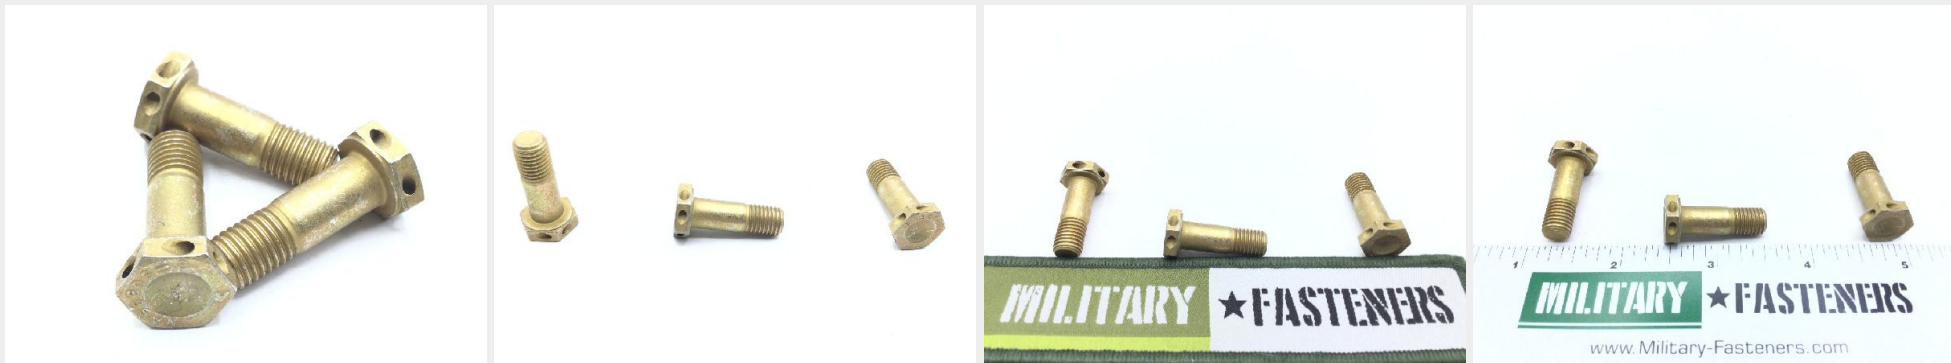

* See page 2 for technical characteristics

P/N NAS6205-8H Specifications

Thread Class:	3a
Thread Length:	0.438 Inches Nominal
Fastener Length:	0.938 Inches Nominal
Head Style:	Dished Hexagon
Head Height:	0.156 Inches Minimum And 0.171 Inches Maximum
Width Between Flats:	0.492 Inches Minimum And 0.502 Inches Maximum
Grip Diameter:	0.311 Inches Minimum And 0.312 Inches Maximum
End Item Identification:	Aircraft Kdc-10, Airframe
Nominal Thread Diameter:	0.312 Inches
Grip Length:	0.500 Inches Nominal
Thread Quantity Per Inch:	24
Special Features:	Nonlocking, Drilled Shank And Drilled Head
Material:	Steel Overall
Surface Treatment:	Cadmium Overall
Surface Treatment Document And Classification:	Qq-p-416, Type Ii, Class 2 Fed Spec All Treatment Responses Overall
Thread Series Designator:	Unjf

How to Order

Order this shear bolt from our inventory online by visiting <https://military-fasteners.com/bolts/shear+bolts/NAS6205-8H> and selecting the quantity you want then click "add to cart". Once items are in your cart you can check out [here](#) to complete your order.