

Description


length: 2.891", grip: 2.313", thread: 3/8-24, hex head, tension, long thread, cadmium plated alloy steel, NAS6606 series bolt

* Manufacturer certifications are shipped with your order FREE of charge

Order this part online

Additional Information

SKU / Model:	NAS660637
Minimum Qty (MOQ):	5
NSN:	5306-01-499-4978
Schedule B:	7318.15.8085
ECCN:	EAR99

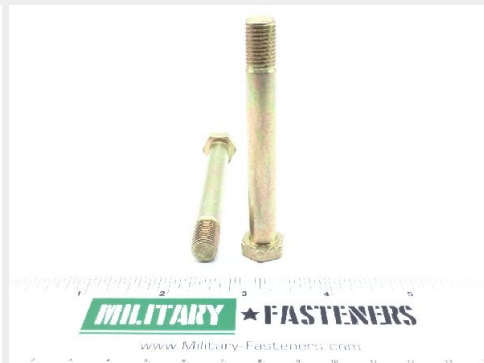

* See page 2 for technical characteristics

P/N NAS6606-37 Specifications

Thread Class:	3a
Thread Direction:	Right-hand
Thread Length:	0.578 Inches Nominal
Fastener Length:	2.876 Inches Minimum And 2.906 Inches Maximum
Head Style:	Dished Hexagon
Head Height:	0.188 Inches Minimum And 0.203 Inches Maximum
Width Between Flats:	0.554 Inches Minimum And 0.564 Inches Maximum
Grip Diameter:	0.3735 Inches Minimum And 0.3745 Inches Maximum
End Item Identification:	F-22
Nominal Thread Diameter:	0.375 Inches
Grip Length:	2.303 Inches Minimum And 2.323 Inches Maximum
Thread Quantity Per Inch:	24
Minimum Tensile Strength:	160000 Pounds Per Square Inch
Surface Finish:	32.0 Microinches Bearing Surface Of Head
Surface Finish:	32.0 Microinches Grip
Surface Finish:	32.0 Microinches Threads
Part Name Assigned By Controlling Agency:	Blot, Hex Head, Close Tolerance, Alloy Steel, Long Thread,non-locking
Material:	Steel Comp E4340 Overall Or Steel Comp 8740 Overall
Material Document And Classification:	Mil-s-5000 Mil Spec 1st Material Response Overall Or Mil-s-6049 Mil Spec 2nd Material Response Overall Or Ams 6322 Assn Std 2nd Material Response Overall
Surface Treatment:	Cadmium Overall And Chromate Overall
Surface Treatment Document And Classification:	Qq-p-416,ty 2 Cl 2 Fed Spec Single Treatment Response Overall
Thread Series Designator:	Unjf

How to Order

Order this shear bolt from our inventory online by visiting <https://military-fasteners.com/bolts/shear+bolts/NAS6606-37> and selecting the quantity you want then click "add to cart". Once items are in your cart you can check out [here](#) to complete your order.